

RULAND

Carefully Made Shaft Collars and Couplings



FLEXIBLE BEAM COUPLINGS



Flexible Beam Couplings from RULAND



Ruland Manufacturing Co., Inc. has been supplying carefully made products since 1937. We have manufactured everything from bicycle pumps to high pressure valves, including the valve that pressurized the spacesuit of the first American to walk in space. In recent years, all of our expertise has been devoted to making the best shaft collars and couplings available.

Three series of zero backlash flexible beam couplings are available with inch and metric bores and outside diameters ranging from 3/8" (9.5mm) to 1-1/2" (38mm). Couplings in all three series are machined from a single piece of aluminum or stainless steel and feature multiple spiral cuts. The multiple cut design provides higher torque capabilities and greatly reduced wind-up compared to commodity-type single beam couplings.

The four beam (P and MW Series) and six beam (F Series) each have two sets of spiral slots, a feature that provides superior parallel misalignment capabilities compared to single beam couplings. Angular misalignment, axial motion and any combination of all three types of misalignment are also easily accommodated by flexible beam couplings. Ruland clamp style flexible beam couplings have the additional benefit of dynamic balancing, due to the unique configuration of the socket head cap screws.

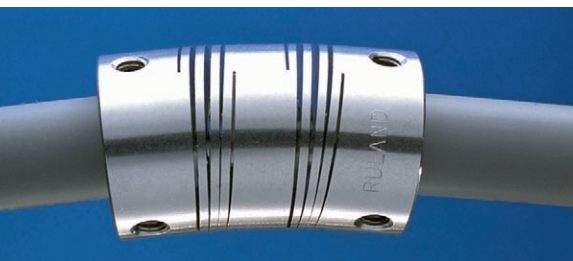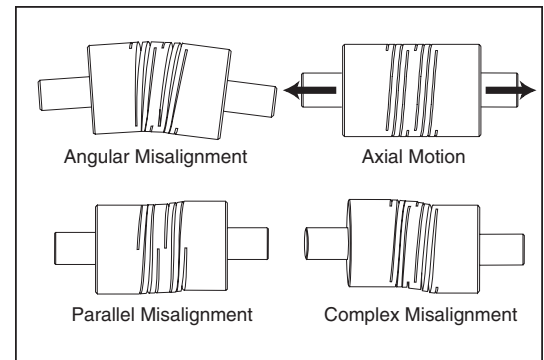

Flexible beam couplings should be used in applications in which misalignment exists between the two shafts being coupled. F series couplings are ideal for light duty power transmission applications such as coupling a servo motor to a lead screw in a motion control system. The couplings feature larger body sizes and stronger beams to provide high torque capacity and very low wind-up, without sacrificing misalignment capabilities.

The demanding nature of reversing servo applications make the performance benefits delivered by the F series vital to maintaining the accuracy, repeatability and reliability of the system.

The P and MW series couplings are designed specifically for precision applications, especially those that use delicate components such as encoders and tachometers. The small bearings on these components make low radial forces essential to longevity and continued high performance. The P and MW series couplings provide extra flexibility to yield reduced bearing loads, and shorter industry standard lengths to fit in confined spaces and allow for easy retrofits in existing equipment. At the same time, the multiple cut pattern continues to provide excellent torque capabilities and low wind-up.

In This Catalog

Inch Dimension Series	
SIX BEAM FLEXIBLE COUPLINGS FCR / FSR	4-5
FOUR BEAM FLEXIBLE COUPLINGS PCR / PSR	6-7
Metric Dimension Series	
FOUR AND SIX BEAM COUPLINGS FCMR / FSMR / MWC / MWS	8-9
FOUR BEAM FLEXIBLE COUPLINGS PCMR / PSMR	10-11

Installation Instructions

1. Assure that the misalignment between shafts is within the coupling's ratings.
2. Align both hubs of the coupling on the shafts that are to be joined.
3. Fully tighten the screw(s) on one hub to their recommended seating torque using an unplated wrench. (See charts below.)
4. Before tightening the screw(s) on the second hub, rotate the coupling by hand to allow it to reach its free length.
5. Tighten the hub on the second shaft such that the misalignment angle remains centered along the length of the coupling and the coupling remains axially relaxed.
6. On relief bore couplings, the shafts may be extended into the relieved area of the coupling without affecting coupling performance.

Hardware Torque Charts

TORQUE RATINGS—CLAMP SCREW


METRIC Clamp Screw	Seating Torque (Nm)	
	ALLOY	STAINLESS STEEL
M1.6	0.29	0.17
M2	0.60	0.36
M2.5	1.21	0.73
M3	2.10	1.10
M4	4.60	2.50
M5	9.50	5.40
M6	16.00	9.60

TORQUE RATINGS—SET SCREW

METRIC Set Screw	Seating Torque (Nm)	
	ALLOY	STAINLESS STEEL
M2	0.21	0.13
M2.5	0.57	0.44
M3	0.92	0.73
M4	2.20	1.76
M5	4.00	3.20
M6	7.20	5.76

HOW TO ORDER

Choose any bore **b1** and any bore **b2** available in a body size. Part numbers are in the following format with numbers representing sixteenths of an inch:

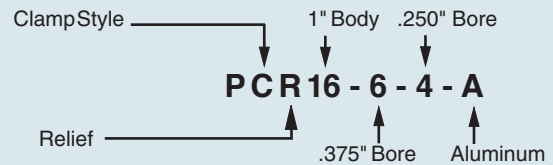

Materials

Aluminum Products: 7075-T651 Extruded and Drawn Aluminum Bar.

Stainless Steel Products: 18-8 (Type 303) Austenitic, Non-magnetic bar or 17-4 ph

Finishes

Aluminum Products: Bright Finish.

Stainless Steel Products: Bright Finish.

Hardware

Inch Couplings in Aluminum and Stainless Steel: Alloy Steel Socket Cap Screws, heat treated. ASA specification B18.3

Metric Couplings in Aluminum and Stainless Steel: Alloy Steel Socket Cap Screws, heat treated, meet or exceed ASA specification B18.3.1M and ASTM A574M property class 12.9

Temperature Range

Aluminum: -40°C (-40°F) to 107°C (225°F)

Stainless Steel: -40°C (-40°F) to 177°C (350°F)

Maximum Speed

6,000 rpm


WARRANTY / DISCLAIMER OF UNSTATED WARRANTIES / LIMITATION OF LIABILITY

Warranty. Ruland warrants that the products sold hereunder meet Ruland's size and materials specifications as set forth in this catalog. Products not meeting Ruland's size and material specifications will, at Ruland's option, be replaced or the purchase price refunded.


Disclaimer of unstated warranties. THE WARRANTY PRINTED ABOVE IS THE ONLY WARRANTY APPLICABLE TO THESE PRODUCTS. ALL OTHER WARRANTIES, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. It is the responsibility of the user to determine the suitability of Ruland products for a specific application. No person, including employees of Ruland or agents in the company's channels of distribution is authorized to represent on Ruland's behalf, the suitability of Ruland products for a specific purpose.

Limitation of Liability. IT IS UNDERSTOOD AND AGREED THAT SELLER'S LIABILITY SHALL NOT EXCEED THE AMOUNT OF THE PURCHASE PRICE. SELLER SHALL NOT BE LIABLE FOR SPECIAL, INDIRECT OR CONSEQUENTIAL DAMAGES. THE PRICE STATED FOR THE PRODUCT IS A CONSIDERATION IN LIMITING RULAND'S LIABILITY.

FCR

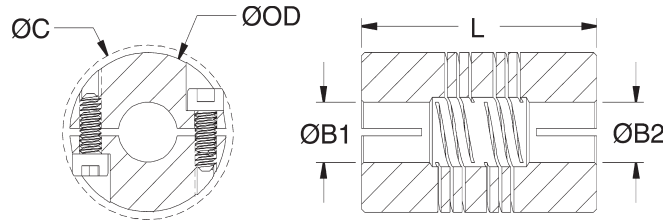

FSR

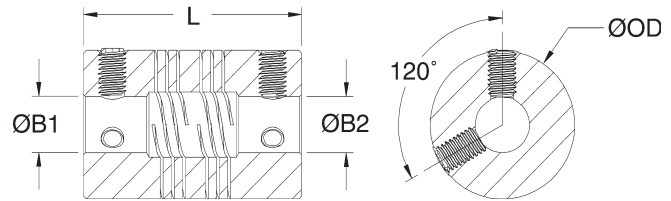

PART NUMBER		SPECIFICATIONS						PERFORMANCE				
CLAMP STYLE	SET SCREW STYLE	BORES B1, B2 (in)	OUTER DIAM. OD (in)	CLEARANCE DIAM C (in) (FCR) MAX	LENGTH L (in)	CAP SCREW (FCR)	SET SCREW (FSR)	STATIC TORQUE (lb-in)	TORSIONAL STIFFNESS (Deg/lb-in)	MISALIGNMENT		MOMENT OF INERTIA (lb-in ²)
										PARALLEL (in)	AXIAL MOTION (in)	
FCR10	FSR10	3 (.1875)	0.625	0.796	1.000	M3	M4	13	0.360	0.008	0.005	0.0013
		4 (.2500)						13	0.360			
FCR12	FSR12	3 (.1875)	0.750	0.879	1.250	M3	M4	26	0.152	0.008	0.005	0.0036
		4 (.2500)						26	0.152			
		5 (.3125)						20	0.229			
FCR16	FSR16	4 (.2500)	1.000	1.117	1.500	M4	M5	35	0.064	0.015	0.010	0.0139
		5 (.3125)						33	0.093			
		6 (.3750)						33	0.093			
FCR20	FSR20	5 (.3125)	1.250	1.459	1.750	M5	M6	70	0.038	0.015	0.010	0.0401
		6 (.3750)						61	0.048			
		8 (.5000)						50	0.072			
		6 (.3750)						120	0.022			
FCR24	FSR24	8 (.5000)	1.500	1.642	2.250	M5	M6	110	0.029	0.030	0.015	0.1023
		10 (.6250)						95	0.043			
		12 (.7500)						80	0.063			



- Note 1** Static torque ratings are at maximum misalignment. To obtain dynamic rating, static ratings should be divided by 2 for non-reversing applications and by 4 for reversing applications.
- Note 2** Hardware is alloy steel with black oxide finish. Stainless steel hardware is available upon request. FCR series parts have two socket head Nypatch® cap screws on each end.
- Note 3** Performance ratings are for guidance only. The user must determine suitability for a particular application.
- Note 4** Coupling torque and wind-up are determined by the largest bore selected.
- Note 5** Angular misalignment on all couplings is 3°.
- Note 6** Shafts may penetrate up to 0.5 x L. Be certain shafts do not touch.

FOR WARRANTY/DISCLAIMER OF UNSTATED WARRANTIES/LIMITATION OF LIABILITY SEE PAGE 3 OR WWW.RULAND.COM

SIX BEAM FLEXIBLE COUPLING

INCH DIMENSION SERIES • STAINLESS STEEL


FCR
FSR

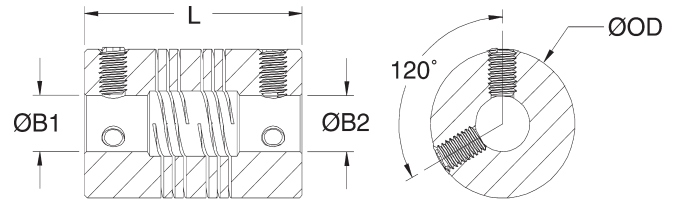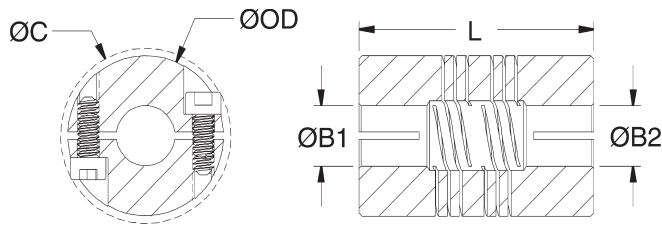

PART NUMBER		SPECIFICATIONS						PERFORMANCE				
CLAMP STYLE	SET SCREW STYLE	BORES B1, B2 (in)	OUTER DIAM. OD (in)	CLEARANCE DIAM C (in) (FCR) MAX	LENGTH L (in)	CAP SCREW (FCR)	SET SCREW (FSR)	STATIC TORQUE (lb-in)	TORSIONAL STIFFNESS (Deg/lb-in)	MISALIGNMENT		MOMENT OF INERTIA (lb-in ²)
										PARALLEL (in)	AXIAL MOTION (in)	
FCR10	FSR10	3 (.1875)	0.625	0.796	1.000	M3	M4	18	0.088	0.008	0.005	0.0037
		4 (.2500)						18	0.088			
FCR12	FSR12	3 (.1875)	0.750	0.879	1.250	M3	M4	41	0.079	0.008	0.005	0.0100
		4 (.2500)						41	0.079			
		5 (.3125)						31	0.096			
FCR16	FSR16	4 (.2500)	1.000	1.117	1.500	M4	M5	53	0.034	0.015	0.010	0.0381
		5 (.3125)						50	0.046			
		6 (.3750)						50	0.046			
FCR20	FSR20	5 (.3125)	1.250	1.459	1.750	M5	M6	142	0.017	0.015	0.010	0.1094
		6 (.3750)						129	0.023			
		8 (.5000)						107	0.037			
		6 (.3750)						208	0.016			
FCR24	FSR24	8 (.5000)	1.500	1.642	2.250	M5	M6	190	0.021	0.030	0.015	0.2814
		10 (.6250)						175	0.031			
		12 (.7500)						145	0.045			

- Note 1** Static torque ratings are at maximum misalignment. To obtain dynamic rating, static ratings should be divided by 2 for non-reversing applications and by 4 for reversing applications.
- Note 2** Hardware is alloy steel with black oxide finish. Stainless steel hardware is available upon request. FCR series parts have two socket head Nypatch® cap screws on each end.
- Note 3** Performance ratings are for guidance only. The user must determine suitability for a particular application.
- Note 4** Coupling torque and wind-up are determined by the largest bore selected.
- Note 5** Angular misalignment on all couplings is 3°.
- Note 6** Shafts may penetrate up to 0.5 x L. Be certain shafts do not touch.

FOR WARRANTY/DISCLAIMER OF UNSTATED WARRANTIES/LIMITATION OF LIABILITY SEE PAGE 3 OR WWW.RULAND.COM

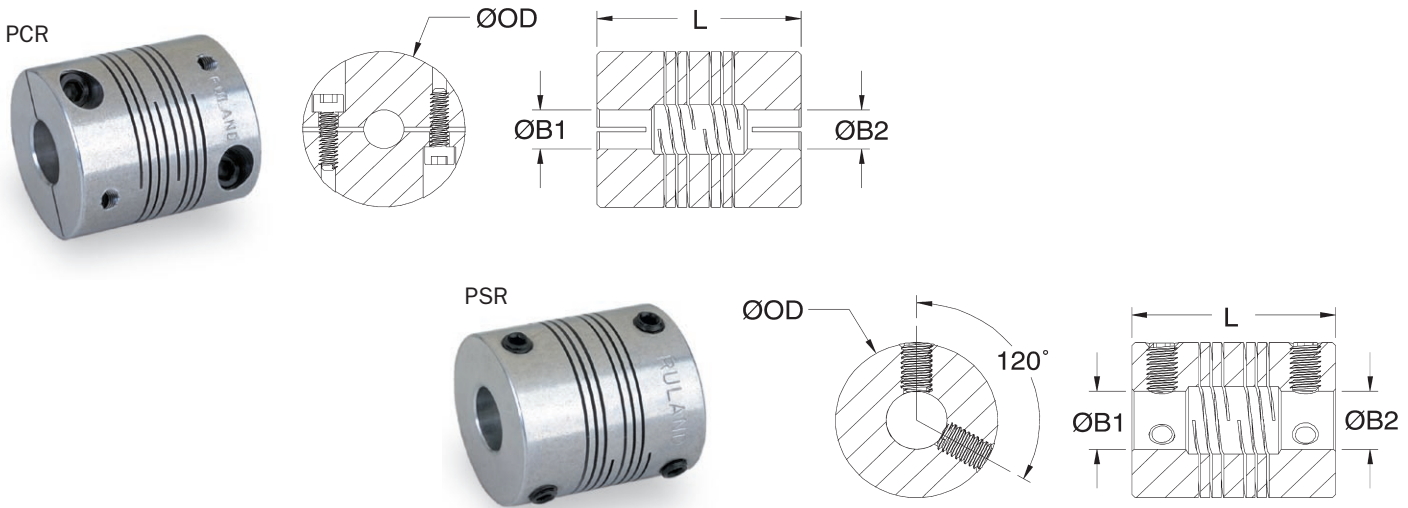

PART NUMBER		SPECIFICATIONS					PERFORMANCE				
CLAMP STYLE	SET SCREW STYLE	BORES B1, B2 (in)	OUTER DIAM. OD (in)	LENGTH L (in) (PCR/PSR)	CAP SCREW (PCR)	SET SCREW (PSR)	STATIC TORQUE (lb-in)	TORSIONAL STIFFNESS (Deg/lb-in)	PARALLEL MISALIGNMENT (in)	AXIAL MOTION (in)	MOMENT OF INERTIA (lb-in ²)
PCR6	PSR6	1.5 (.0938)	0.375	0.563	M1.6	M2	5.5	1.34	0.008	0.005	0.0001
PCR8	PSR8	1.5 (.0938)	0.500	0.750	M2	M2	8	0.75	0.008	0.005	0.0004
		2 (.1250)					8	0.75			
PCR10	PSR10	2.5 (.1563)	0.625	0.800	M2	M3	15	0.36	0.008	0.005	0.0011
		3 (.1875)					12	0.54			
		2 (.1250)					12	0.54			
PCR12	PSR12	2.5 (.1563)	0.750	0.900	M2.5	M4	26	0.18	0.008	0.005	0.0025
		3 (.1875)					17	0.26			
		4 (.2500)					17	0.26			
		3 (.1875)					14	0.33			
PCR14	PSR14	4 (.2500)	0.875	1.063	M3	M4	20	0.17	0.008	0.005	0.0056
		5 (.3125)					18	0.21			
		4 (.2500)					16	0.27			
PCR16	PSR16	5 (.3125)	1.000	1.250	M4	M4	36	0.16	0.015	0.010	0.0116
		6 (.3750)					33	0.18			
		4 (.2500)					30	0.20			
PCR18	PSR18	5 (.3125)	1.125	1.500	M4	M5	47	0.10	0.015	0.010	0.0217
		6 (.3750)					44	0.11			
		8 (.5000)					40	0.14			
		4 (.2500)					34	0.22			
PCR20	PSR20	5 (.3125)	1.250	1.500	M4	M6	68	0.06	0.015	0.010	0.0340
		6 (.3750)					64	0.06			
		8 (.5000)					60	0.07			
		4 (.2500)					52	0.12			

Note 1 Static torque ratings are at maximum misalignment. To obtain dynamic rating, static ratings should be divided by 2 for non-reversing applications and by 4 for reversing applications.

Note 2 Hardware is alloy steel with black oxide finish. PCR series parts have socket head cap screws on each end. PSR series parts: sizes 6 through 12 have one set screw on each end; sizes 14 through 20 have two set screws on each end 120° apart.

Note 3 Performance ratings are for guidance only. The user must determine suitability for a particular application.

Note 4 Angular misalignment on all couplings is 3°.

Note 5 Shafts may penetrate up to 0.5 x L. Be certain shafts do not touch.



Note 6 Coupling torque and wind-up are determined by the largest bore selected.

FOR WARRANTY/DISCLAIMER OF UNSTATED WARRANTIES/LIMITATION OF LIABILITY SEE PAGE 3 OR WWW.RULAND.COM

FOUR BEAM FLEXIBLE COUPLINGS

INCH DIMENSION SERIES • STAINLESS STEEL

PCR/PSR

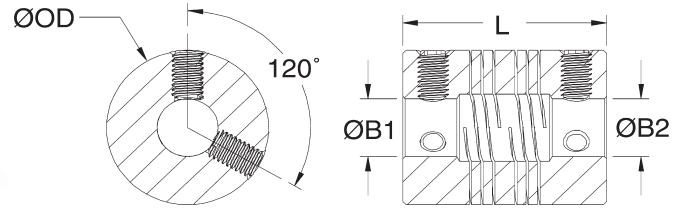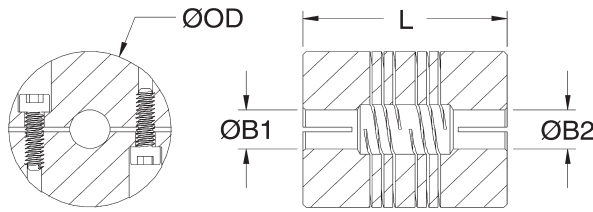

PART NUMBER		SPECIFICATIONS					PERFORMANCE				
CLAMP STYLE	SET SCREW STYLE	BORES B1, B2 (in)	OUTER DIAM. OD (in)	L (in) (PCR/PSR)	CAP SCREW (PCR)	SET SCREW (PSR)	STATIC TORQUE (lb-in)	TORSIONAL STIFFNESS (Deg/lb-in)	PARALLEL MISALIGNMENT (in)	AXIAL MOTION (in)	MOMENT OF INERTIA (lb-in ²)
PCR6	PSR6	1.5 (.0938)	0.375	0.563	M1.6	M2	7.5	0.751	0.008	0.005	0.0003
PCR8	PSR8	1.5 (.0938)	0.500	0.750	M2	M2	11	0.368	0.008	0.005	0.0012
		2 (.1250)					11	0.368			
		2 (.1250)					20	0.184			
PCR10	PSR10	2.5 (.1563)	0.625	0.800	M2	M3	16	0.286	0.008	0.005	0.0030
		3 (.1875)					16	0.286			
		2 (.1250)					35	0.085			
PCR12	PSR12	2.5 (.1563)	0.750	0.900	M2.5	M4	23	0.151	0.008	0.005	0.0070
		3 (.1875)					23	0.151			
		4 (.2500)					19	0.179			
PCR14	PSR14	3 (.1875)	0.875	1.063	M3	M5	27	0.091	0.008	0.005	0.0157
		4 (.2500)					24	0.107			
		4 (.2500)					22	0.135			
PCR16	PSR16	4 (.2500)	1.000	1.250	M4	M4	49	0.079	0.015	0.010	0.0317
		5 (.3125)					44	0.094			
		6 (.3750)					41	0.103			
PCR18	PSR18	4 (.2500)	1.125	1.500	M4	M5	63	0.053	0.015	0.010	0.0603
		5 (.3125)					60	0.056			
		6 (.3750)					54	0.071			
PCR20	PSR20	8 (.5000)	1.250	1.500	M4	M6	46	0.111	0.015	0.010	0.0922
		4 (.2500)					92	0.031			
		5 (.3125)					86	0.037			
		6 (.3750)					81	0.044			
		8 (.5000)					70	0.064			

Note 1 Static torque ratings are at maximum misalignment. To obtain dynamic rating, static ratings should be divided by 2 for non-reversing applications and by 4 for reversing applications.

Note 2 Hardware is alloy steel with black oxide finish. PCR series parts have socket head cap screws on each end. PSR series parts: sizes 6 through 12 have one set screw on each end; sizes 14 through 20 have two set screws on each end 120° apart.


Note 3 Performance ratings are for guidance only. The user must determine suitability for a particular application.

Note 4 Angular misalignment on all couplings is 3°.

Note 5 Shafts may penetrate up to 0.5 x L. Be certain shafts do not touch.

Note 6 Coupling torque and wind-up are determined by the largest bore selected.

FOR WARRANTY/DISCLAIMER OF UNSTATED WARRANTIES/LIMITATION OF LIABILITY SEE PAGE 3 OR WWW.RULAND.COM

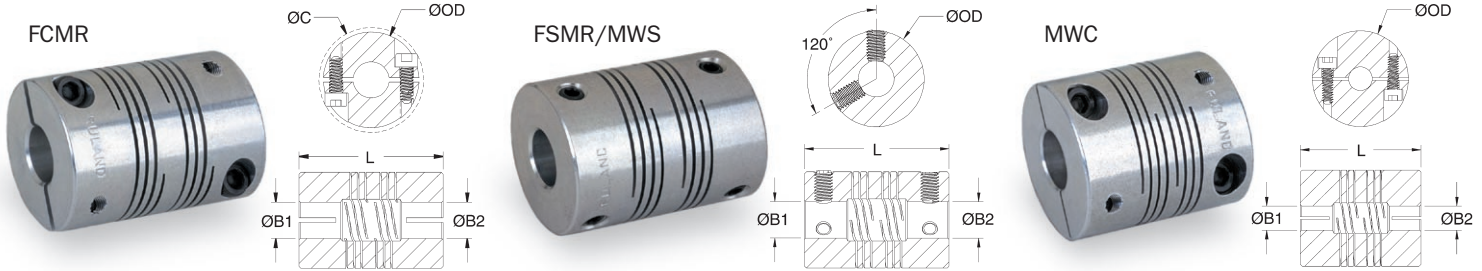

PART NUMBER		SPECIFICATIONS						PERFORMANCE				
CLAMP STYLE	SET SCREW STYLE	BORES B1,B2 (mm)	OUTER DIAM OD (mm)	LENGTH L (mm) (FCMR/MWC)	LENGTH L (mm) (FSMR/MWS)	CAP SCREW (FCMR/MWC)	SET SCREW (FSMR/MWS)	STATIC TORQUE (Nm)	WIND-UP (Deg/Nm)	PARALLEL MISALIGNMENT (mm)	AXIAL MOTION (mm)	MOMENT OF INERTIA (x10 ⁻⁵ kg-m ²)
FCMR16	FSMR16	5	15.88	25.4	25.4	M3	M4	1.47	3.211	0.203	0.127	
		6						1.47	3.211			
FCMR19	FSMR19	5	19.05	31.75	31.75	M3	M4	2.94	1.331	0.203	0.127	
		6						2.94	1.331			
		7						2.71	1.666			
		8						2.26	2.036			
		6						3.95	0.548			
		7						3.95	0.548			
FCMR25	FSMR25	9	25.4	38.1	38.1	M4	M5	3.73	0.862	0.381	0.254	
		10						3.73	0.862			
		11						3.28	1.097			
		12						2.82	1.566			
		8						7.91	0.313			
FCMR32	FSMR32	9	31.75	44.45	44.45	M5	M6	6.89	0.392	0.381	0.254	
		10						6.89	0.392			
		11						5.65	0.627			
		12						5.65	0.627			
		14						5.08	0.705			
		15						4.86	0.862			
FCMR38	FSMR38	10	38.1	57.15	57.15	M5	M6	13.56	0.157	0.762	0.381	
		11						12.43	0.235			
		12						12.43	0.235			
		14						12.43	0.235			
		15						10.73	0.392			
		16						10.73	0.392			
MWC15	MWS15	3	15	22	20	M2	M3	0.85	4.44	0.20	0.12	0.293
		4						0.85	4.44			
		5						0.81	5.21			
MWC20	MWS20	4	20	28	20	M3	M3	1.30	2.01	0.20	0.12	1.053
		5						1.30	2.01			
		6						1.15	2.48			
MWC25	MWS25	6	25	30	24	M3	M4	3.42	1.22	0.38	0.25	2.955
		8						3.42	1.22			
		10						3.10	1.75			
MWC30	MWS30	8	30	38	30	M4	M5	6.90	0.71	0.38	0.25	7.958
		10						6.90	0.71			
		12						6.60	0.93			


- Note 1** Static torque ratings are at maximum misalignment. To obtain dynamic rating, static ratings should be divided by 2 for non-reversing applications and by 4 for reversing applications.
- Note 2** Hardware is alloy steel with black oxide finish. Stainless steel hardware is available upon request. FCMR and MWC series parts have two socket head Nypatch® cap screws on each end. FSMR and MWS parts have two set screws on each end 120° apart.
- Note 3** Performance ratings are for guidance only. The user must determine suitability for a particular application.
- Note 4** Coupling torque and wind-up are determined by the largest bore selected.
- Note 5** Angular misalignment on all couplings is 3°.
- Note 6** Shafts may penetrate up to 0.5 x L. Be certain shafts do not touch.

FOR WARRANTY/DISCLAIMER OF UNSTATED WARRANTIES/LIMITATION OF LIABILITY SEE PAGE 3 OR WWW.RULAND.COM

SIX BEAM AND FOUR BEAM COUPLINGS

METRIC DIMENSION SERIES • STAINLESS STEEL

FCMR/FSMR MWC/MWS

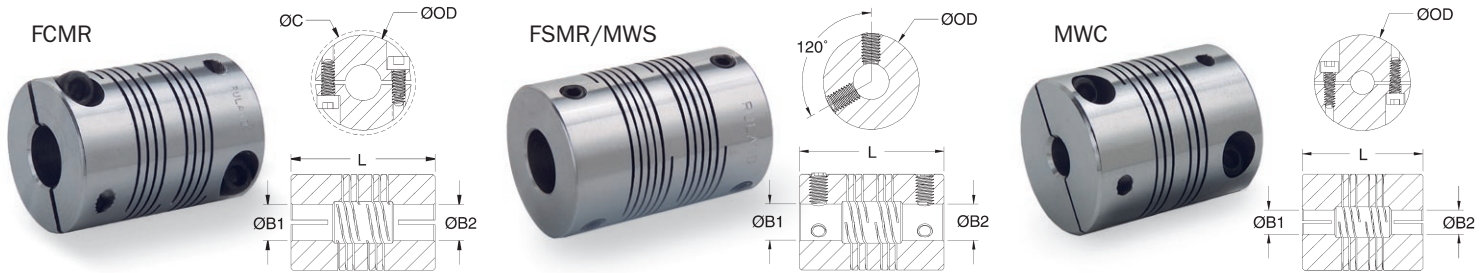


PART NUMBER		SPECIFICATIONS						PERFORMANCE				
CLAMP STYLE	SET SCREW STYLE	BORES B1,B2 (mm)	OUTER DIAM OD (mm)	LENGTH L (mm) (FCMR/MWC)	LENGTH L (mm) (FSMR/MWS)	CAP SCREW (FCMR/MWC)	SET SCREW (FSMR/MWS)	STATIC TORQUE (Nm)	WIND-UP (Deg/Nm)	PARALLEL MISALIGNMENT (mm)	AXIAL MOTION (mm)	MOMENT OF INERTIA (x10 ⁻⁶ kg-m ²)
FCMR16	FSMR16	5	15.88	25.4	25.4	M3	M4	2.04	0.78	0.381	0.254	
		6						2.04	0.78			
FCMR19	FSMR19	5	19.05	31.75	30	M3	M4	4.64	0.70	0.203	0.127	
		6						4.64	0.70			
		7						3.51	0.85			
		8						3.51	0.85			
		6						6.00	0.30			
FCMR25	FSMR25	7	25.4	38.1	40	M4	M5	6.00	0.30	0.381	0.254	
		8						6.00	0.30			
		9						5.66	0.41			
		10						5.66	0.41			
		11						4.40	0.74			
FCMR32	FSMR32	12	31.75	44.45	45	M5	M6	4.40	0.74	0.381	0.254	
		8						16.08	0.15			
		9						16.08	0.15			
		10						16.08	0.15			
		11						14.60	0.20			
FCMR38	FSMR38	12	38.1	57.15	55	M5	M6	11.32	0.33	0.762	0.381	
		14						11.32	0.33			
		15						23.53	0.14			
		11						21.52	0.19			
		12						21.52	0.19			
MWC15	MWS15	3	15	22	20	M2	M3	21.52	0.19	0.20	0.12	0.731
		4						1.30	2.23			
		5						1.30	2.23			
MWC20	MWS20	4	20	28	20	M3	M3	1.20	2.52	0.20	0.12	2.984
		5						2.00	0.98			
		6						2.00	0.98			
MWC25	MWS25	6	25	30	24	M3	M4	1.70	1.29	0.38	0.25	7.871
		8						5.10	0.58			
		10						5.10	0.58			
MWC30	MWS30	8	30	38	30	M4	M5	4.60	0.83	0.38	0.25	20.920
		10						10.40	0.33			
		12						10.40	0.33			


- Note 1** Static torque ratings are at maximum misalignment. To obtain dynamic rating, static ratings should be divided by 2 for non-reversing applications and by 4 for reversing applications.
- Note 2** Hardware is alloy steel with black oxide finish. Stainless steel hardware is available upon request. FCMR and MWC series parts have two socket head Nypatch® cap screws on each end. FSMR and MWS parts have two set screws on each end 120° apart.
- Note 3** Performance ratings are for guidance only. The user must determine suitability for a particular application.
- Note 4** Coupling torque and wind-up are determined by the largest bore selected.
- Note 5** Angular misalignment on all couplings is 3°.
- Note 6** Shafts may penetrate up to 0.5 x L. Be certain shafts do not touch.

FOR WARRANTY/DISCLAIMER OF UNSTATED WARRANTIES/LIMITATION OF LIABILITY SEE PAGE 3 OR WWW.RULAND.COM

PCMR

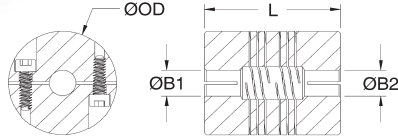

PSMR

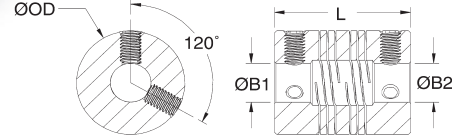

PART NUMBER		SPECIFICATIONS					PERFORMANCE				
CLAMP STYLE	SET SCREW STYLE	BORES B1, B2 (mm)	OUTER DIAM OD (mm)	LENGTH L (mm) (PCMR/PSMR)	CAP SCREW (PCMR)	SET SCREW (PSMR)	STATIC TORQUE (Nm)	TORSIONAL STIFFNESS (Deg/Nm)	MISALIGNMENT PARALLEL (mm)	AXIAL MOTION (mm)	MOMENT OF INERTIA (x10 ⁶ kg-m ²)
PCMR10	PSMR10	3	9.5	14.3	M1.6	M2	0.62	11.83	0.203	0.127	0.029
PCMR13	PSMR13	3	12.7	19.1	M2	M2	0.90	6.66	0.203	0.127	0.117
		3					1.70	3.21			
PCMR16	PSMR16	4	15.9	20.3	M2	M3	1.36	4.78	0.203	0.127	0.322
		5					1.36	4.78			
		3					2.94	1.57			
PCMR19	PSMR19	4	19.1	22.9	M2.5	M4	1.92	2.27	0.203	0.127	0.731
		5					1.92	2.27			
		6					1.58	2.90			
		5					2.26	1.49			
PCMR22	PSMR22	6	22.2	27.0	M3	M4	2.03	1.88	0.203	0.127	1.639
		7					1.81	2.43			
		8					1.81	2.43			
		6					4.07	1.41			
PCMR25	PSMR25	7	25.4	31.8	M4	M4	4.07	1.41	0.381	0.254	3.394
		8					3.73	1.57			
		9					3.39	1.80			
		6					5.31	0.86			
		7					5.31	0.86			
		8					4.97	0.94			
PCMR29	PSMR29	9	28.6	38.1	M4	M5	4.52	1.25	0.381	0.254	6.349
		10					4.52	1.25			
		11					3.84	1.96			
		12					3.84	1.96			
		6					7.68	0.53			
		7					7.68	0.53			
		8					7.23	0.53			
PCMR32	PSMR32	9	31.8	38.1	M4	M6	6.78	0.53	0.381	0.254	9.948
		10					6.78	0.62			
		11					5.88	1.10			
		12					5.88	1.10			

Note 1 Static torque ratings are at maximum misalignment. To obtain dynamic rating, static ratings should be divided by 2 for non-reversing applications and by 4 for reversing applications.

Note 2 Hardware is alloy steel with black oxide finish. PCMR series parts have socket head cap screws on each end. Parts PSMR10 through PSMR19 have one set screw on each end. PSMR22 through PSMR32 have two set screws 120° apart.

Note 3 Performance ratings are for guidance only. The user must determine suitability for a particular application.

Note 4 Coupling torque and wind-up are determined by the largest bore selected.

Note 5 Angular misalignment on all couplings is 3°.

Note 6 Shafts may penetrate up to 0.5 x L. Be certain shafts do not touch.


FOR WARRANTY/DISCLAIMER OF UNSTATED WARRANTIES/LIMITATION OF LIABILITY SEE PAGE 3 OR WWW.RULAND.COM

FOUR BEAM FLEXIBLE COUPLINGS


METRIC DIMENSION SERIES • STAINLESS STEEL

PCMR/PSMR

PCMR

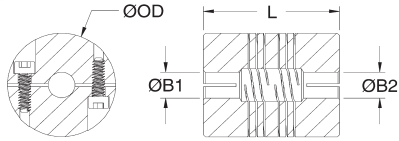

PSMR/ISMR

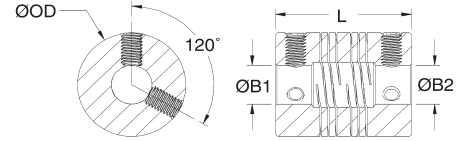

PART NUMBER		SPECIFICATIONS					PERFORMANCE					
CLAMP STYLE	SET SCREW STYLE	BORES B1, B2 (mm)	OD (mm)	LENGTH (mm) (PCMR/PSMR)	SCREW CAP (PCMR)	SET (PSMR)	STATIC TORQUE (Nm)	TORSIONAL STIFFNESS (Deg/Nm)	MISALIGNMENT PARALLEL (mm)	AXIAL MOTION (mm)	MOMENT OF INERTIA (x10 ⁶ kg-m ²)	
PCMR10	PSMR10	3	9.5	14.3	M1.6	M2	0.85	6.65	0.203	0.127	0.088	
PCMR13	PSMR13	3	12.7	19.1	M2	M2	1.24	3.26	0.203	0.127	0.351	
		3					2.26	1.63				
PCMR16	PSMR16	4	15.9	20.3	M2	M3	1.81	2.53	0.203	0.127	0.878	
		5					1.81	2.53				
PCMR19	PSMR19	3					3.95	0.75				
		4	19.1	22.9	M2.5	M4	2.60	1.34	0.203	0.127	2.048	
		5					2.60	1.34				
		6					2.15	1.58				
		5					3.05	0.81				
PCMR22	PSMR22	6					2.71	0.95				
		7	22.2	27.0	M3	M4	2.49	1.19	0.203	0.127	4.594	
		8					2.49	1.19				
PCMR25	PSMR25	6					5.54	0.70				
		7	25.4	31.8	M4	M4	4.97	0.83	0.381	0.254	9.275	
		8					4.97	0.83				
		9					4.63	0.91				
		6					7.12	0.47				
		7					6.78	0.50				
		8					6.78	0.50				
PCMR29	PSMR29	9	28.6	38.1	M4	M5	6.10	0.63	0.381	0.254	17.643	
		10					6.10	0.63				
		11					5.20	0.98				
		12					5.20	0.98				
PCMR32	PSMR32	6					10.40	0.27				
		7					9.72	0.33				
		8					9.72	0.33				
		9	31.8	38.1	M4	M6	9.15	0.39	0.381	0.254	26.977	
		10					9.15	0.39				
		11					7.91	0.57				
		12					7.91	0.57				

- Note 1** Static torque ratings are at maximum misalignment. To obtain dynamic rating, static ratings should be divided by 2 for non-reversing applications and by 4 for reversing applications.
- Note 2** Hardware is alloy steel with black oxide finish. PCMR series parts have socket head cap screws on each end. Parts PSMR10 through PSMR19 have one set screw on each end. PSMR22 through PSMR32 have two set screws 120° apart.
- Note 3** Performance ratings are for guidance only. The user must determine suitability for a particular application.
- Note 4** Coupling torque and wind-up are determined by the largest bore selected.
- Note 5** Angular misalignment on all couplings is 3°.
- Note 6** Shafts may penetrate up to 0.5 x L. Be certain shafts do not touch.

FOR WARRANTY/DISCLAIMER OF UNSTATED WARRANTIES/LIMITATION OF LIABILITY SEE PAGE 3 OR WWW.RULAND.COM

Available from RULAND

We are committed to have the largest variety of sizes and styles in the industry. In addition to the items listed below, we can manufacture an extensive variety of special designs. Please contact us with your custom needs.

OLDHAM COUPLING

Clamp and
set screw
styles.



BELLOWS COUPLING

Clamp and
set screw
styles.



BEAM COUPLING

Clamp and
set screw
styles.



JAW COUPLING

Clamp and
set screw
styles.



CLAMPING DEVICE

Single and
dual taper
styles.



SHAFT COLLAR

One- and
two-piece
styles.



DISC COUPLING

Clamp and
set screw
styles.



RIGID COUPLING

One- and
two-piece
styles.



RULAND Manufacturing Co., Inc.

6 Hayes Memorial Drive • Marlborough, MA 01752
(508) 485-1000 • fax (508) 485-9000
www.ruland.com • sales@ruland.com

Est. 1937