

**THERMASHIELD WRAP**

- Economical And Easy To Install
- Cuts Easily With Scissors
- Reflects Radiant Heat
- Insulates Delicate Wires And Components
- Resists Gasoline And Engine Chemicals



**Cut Cleanly  
 Scissors**


**Put-Ups**

Nominal Size	Part #	Sheet Width	Wall Thickness ±0.008"	Bulk Spool	Shop Spool	Available Colors	Lbs/100'
1/2"	TWN0.50SV	1 13/16"	0.025"	200'	100'	Silver	2.60
3/4"	TWN0.75SV	2 1/2"	0.025"	200'	100'	Silver	4.00
1"	TWN1.00SV	3 3/8"	0.025"	200'	100'	Silver	5.10
1 1/4"	TWN1.25SV	4 1/4"	0.025"	200'	100'	Silver	5.70
1 1/2"	TWN1.50SV	5"	0.025"	200'	100'	Silver	6.50
1 3/4"	TWN1.75SV	5 13/16"	0.025"	100'	50'	Silver	7.40
2"	TWN2.00SV	6 11/16"	0.025"	100'	50'	Silver	8.40
2 1/4"	TWN2.25SV	7 3/8"	0.025"	100'	50'	Silver	9.50

**Reflective Aluminized Surface Bonded To Insulating Fiberglass**

THERMASHIELD creates a buffer between your wires, hoses and cables and the high temperature environments they are required to perform in. ThermaShield is engineered by laminating an aluminum heat shield to a layer of strong fiberglass insulation. This system provides superior protection from radiant heat by reflecting it away from sensitive electronics, wiring and hoses.

THERMASHIELD WRAP (TWN). When component disassembly isn't an option, TWN is the solution. Designed to fit securely around existing assemblies and hard to reach components, the flat material is joined along the edge with a strip of permanent, high temperature adhesive. The aggressive bonding agent will securely adhere anywhere along the width of the material, affording maximum protection and allowing a snug fit around odd-shaped connectors and terminations.

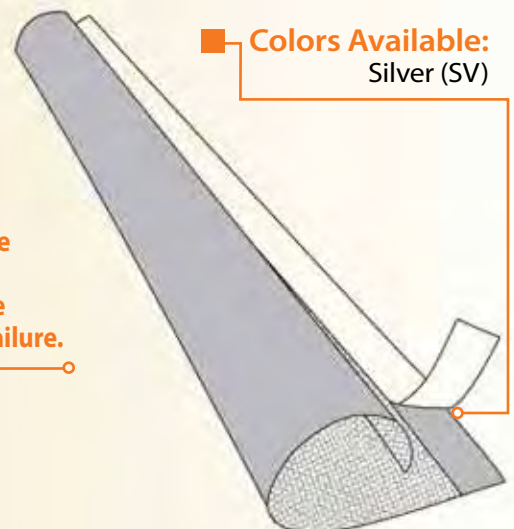

**Colors Available:  
 Silver (SV)**

**When applied, the aluminum laminate reflects heat away and the insulating fiberglass backing protects the fragile contents from thermal damage and failure.**

<b>Material</b>	Aluminum Laminated Fiberglass
<b>Grade</b>	TWN
<b>Wall Thickness</b>	.025"
<b>Drawing Number</b>	TF001TW-WD





**THERMASHIELD WRAP**



**Abrasion Resistance**  
Very High

**Abrasion Test Machine**  
Taber 5150

**Abrasion Test Wheel**  
Calibrase H-18

**Abrasion Test Load**  
500g

**Room Temperature**  
70°F

**Humidity**  
57%

**Foil Layer Worn Through**  
1,000 Test Cycle

**Fiberglass Layer Worn Through - Material Destroyed**  
1,300 Test Cycles



Rating \_\_\_\_\_  
\_\_\_\_ Non Combustible / Will not Burn



**Chemical Resistance**

1=No Effect    4=More Affected  
2=Little Effect    5=Severely Affected  
3=Affected

Aromatic Solvents _____	1
Aliphatic Solvents _____	1
Chlorinated Solvents _____	1
Weak Bases _____	1
Salts _____	1
Strong Bases _____	1
Salt Water <i>O-S-1926</i> _____	1
Hydraulic Fluid <i>MIL-H-5606</i> _____	1
Lube Oil <i>MIL-L-7808</i> _____	1
De-Icing Fluid <i>MIL-A-8243</i> _____	1
Strong Acids _____	2
Strong Oxidants _____	2
Esters/Keytones _____	1
UV Light _____	1
Petroleum _____	1
Fungus <i>ASTM G-21</i> _____	1
Halogen Free _____	Yes
RoHS _____	Yes
SVHC _____	

**Melt Point**  
*ASTM D-2117*  
2,048°F (1,120°C)

**Maximum Continuous**  
*Mil-I-23053*  
491°F (255°C)

**Minimum Continuous**  
-76°F (-60°C)



**PHYSICAL PROPERTIES**

Monofilament Diameter \_\_\_\_\_ NA  
*ASTM D-204*

Flammability Rating \_\_\_\_\_ Non Combustible

Recommended Cutting \_\_\_\_\_ Scissor

Colors \_\_\_\_\_ 1

Wall Thickness \_\_\_\_\_ .025

www.techflex.com