SPOTNAILS®

# TOOLS & FASTENERS

# SPOTNAILS®

*Spotnails has been one of the leading manufacturers of pneumatically driven fasteners for nearly 70 years. The company manufactures a wide range of industrial fastening products including nails, staples, pins, brads and tools for use in packaging, furniture/woodworking, construction, factory-built housing and many other industries.*

*With manufacturing facilities in the United States, Mexico and Korea, Spotnails is keeping pace with the ever increasing demand for high quality tools and fasteners.*

## Spotnails "Firsts" Include:

- *The FIRST portable nailer to drive fasteners over half an inch long*
- *The FIRST patented divergent chisel staple*
- *The FIRST pneumatic nailer with air return*
- *The FIRST portable nailer for two and one-half inch nails*
- *The FIRST true brad for magazine loading*
- *The FIRST nylon coated fasteners*

## Table Of Contents


| | | | |
|---|---|---|---|
| Page 3 | Framing Nailers | Page 11 | Flooring Tools |
| Page 4 | Coil Nailers/T-Nailers | Page 12 | Fine Wire/Upholstery Staplers |
| Page 5 | T-Nailers/Finish Nailers/Bradders | Page 13 | Specialty Tools |
| Page 6 | Bradders/Pinners | Page 14 | Stainless Steel Fasteners |
| Page 7 | Staplers (14, 15 & 16 Gauge) | Page 15 | SS Fine Wire Fasteners/ Tool Accessories |
| Page 8 | Wide Crown Staplers (16 Gauge) | Page 16 | Universal Fasteners |
| Page 9 | Medium Crown Staplers | Page 19 | Tebo Decker Tool |
| Page 10 | Medium/Narrow Crown Staplers | Page 20 | Cap Staplers |

## YPR90 21° FRAMING NAILER

Weight: 8 lbs. 5 oz.
Dimensions: 20″ L x 5″ W x 13″ H

| Tool | Nail Capacity | Nail Range | Diameter | Exhaust |
|---|---|---|---|---|
| YPR90 | 70 Nails | 2″ to 3-1/2″<br>50mm to 90mm | .113 - .148 | Adjustable |

***Applications:***
*Framing, Fencing, Decking, Pallets, Sheathing, Crating, Siding, General Manufacturing*

***Features:***
***Uses Spotnails® 20-22° Nails,*** *360° Adj. Exhaust, Rubber Grip for Comfort, Restrictive Trigger, Belt Hook, Flush Drive Attachments Available (#AS99076), Plastic Carrying Case*



## NPR90 21° FRAMING NAILER

Weight: 8 lbs. 6 oz.
Dimensions: 21″ L x 4″ W x 13-3/4″ H

| Tool | Nail Capacity | Nail Range | Diameter | Exhaust |
|---|---|---|---|---|
| NPR90 | 50 - 75 Nails | 2″ to 3-1/2″<br>50mm to 90mm | .113 - .148 | Front |

***Applications:***
*Framing, Decking, Fencing, Pallets, Sheathing, Crating, Siding, General Manufacturing*

***Features:***
***Uses Spotnails® 20-22° Nails,*** *Rubber Grip for Comfort, Restrictive Trigger, Belt Hook, Flush Drive Attachments Available (#AS99076)*



## YTD90 31° CLIPPED HEAD FRAMING NAILER

Weight: 8 lbs. 5 oz.
Dimensions: 20″ L x 5″ W x 13″ H

| Tool | Nail Capacity | Nail Range | Diameter | Exhaust |
|---|---|---|---|---|
| YTD90 | 89 Nails | 2″ to 3-1/2″<br>50mm to 90mm | .113 - .148 | Adjustable |

***Applications:***
*Framing, Decking, Fencing, Pallets, Sheathing, Crating, Siding, General Manufacturing*

***Features:***
***Uses Spotnails® 31° Clipped Head Strip Nails,*** *360° Adj. Exhaust, Rubber Grip for Comfort, Restrictive Trigger, Belt Hook, Flush Drive Attachments Available (#AS99076), Plastic Carrying Case*



## NTD90 31° CLIPPED HEAD FRAMING NAILER

Weight: 8 lbs. 6 oz.
Dimensions: 16-1/2″ L x 4-1/2″ W x 14-1/2″ H

| Tool | Nail Capacity | Nail Range | Diameter | Exhaust |
|---|---|---|---|---|
| NTD90 | 89 Nails | 2″ to 3-1/2″<br>50mm to 90mm | .113 - .148 | Front |

***Applications:***
*Framing, Decking, Fencing, Pallets, Sheathing, Crating, Siding, General Manufacturing*

***Features:***
***Uses Spotnails® 31° Clipped Head Strip Nails,*** *Rubber Grip for Comfort, Restrictive Trigger, Belt Hook, Flush Drive Attachments Available (#AS99076)*



## YCN83 COIL FRAMING NAILER

Weight: 8 lbs. 7 oz.
Dimensions: 13″ L x 5-3/8″ W x 13-1/2″ H

| Tool | Nail Capacity | Nail Range | Diameter | Exhaust |
|---|---|---|---|---|
| YCN83 | 225 Nails | 2″ to 3-1/4″<br>50mm to 83mm | .113 - .131 | Adjustable |

***Applications:***
*Framing, Decking, Fencing, Pallets, Sheathing, Crating, Siding, General Manufacturing*

***Features:***
***Uses Spotnails® Coil Nails,*** *360° Adjustable Exhaust, Rubber Grip for Comfort, Flush Drive Attachments Available (#AS99076)*



## VRN45 COIL ROOFING NAILER

Weight: 5 lbs. 6 oz.
Dimensions: 12" L x 4" W x 10-1/2" H

| Tool | Nail Capacity | Nail Range | Diameter | Exhaust |
|---|---|---|---|---|
| VRN45 | 120 Roofing Nails | 7/8" to 1-3/4"<br>22mm to 45mm | .120 | Adjustable |

***Applications:***
*Roofing*

***Features:***
***Uses Spotnails® Coil Roofing Nails,*** *360° Adjustable Exhaust, Rubber Grip for Comfort*



## MCW64 15° PALLET & FENCING NAILER

Weight: 6 lbs. 2 oz.
11-3/8" L x 5" W x 11-7/8" H

| Tool | Nail Capacity | Nail Range | Diameter | Exhaust |
|---|---|---|---|---|
| MCW64 | 275 Nails | 1-1/4" to 2-1/2"<br>32mm to 64mm | .083 - .099 | Adjustable |

***Applications:***
*Fencing, Pallets, Framing, Decking, Sheathing*

***Features:***
***Uses Spotnails® Flat Coil Nails,*** *360° Adjustable Exhaust, Rubber Grip for Comfort*



## LCN57 MINI FLAT COIL NAILER

Weight: 5 lbs. 1 oz.
10-1/2" L x 4-3/4" W x 10-3/4" H

| Tool | Nail Capacity | Nail Range | Diameter | Exhaust |
|---|---|---|---|---|
| LCN57 | 300 Nails | 1-1/4" to 2-1/4"<br>32mm to 57mm | .083 | Front |

***Applications:***
*Fencing and Siding*

***Features:***
***Uses Spotnails® Flat Coil Nails,*** *Rubber Grip for Comfort*



## VCN50 MINI CONE COIL NAILER

Weight: 5 lbs. 6 oz.
11-1/2" L x 4-1/2" W x 10-1/2" H

| Tool | Nail Capacity | Nail Range | Diameter | Exhaust |
|---|---|---|---|---|
| VCN50 | 350 Nails | 1-1/4" to 2"<br>32mm to 50mm | .083 | Adjustable |

***Applications:***
*Fencing and Siding*

***Features:***
***Uses Spotnails® Cone Coil Nails,*** *360° Adjustable Exhaust, Rubber Grip for Comfort*



## MT9764 T-NAILER

Weight: 5 lbs. 9 oz.
15" L x 4-1/2" W x 10-1/2" H

| Tool | Nail Capacity | Nail Range | Diameter | Exhaust |
|---|---|---|---|---|
| MT9764 | 80 T-Nails | 5/8" to 2-1/2"<br>16mm to 64mm | .097 | Adjustable |

***Applications:***
*Fastening Tack Strips to Concrete*

***Features:***
*360° Adjustable Exhaust, Rubber Grip for Comfort, Quick Clear Nose, Restrictive Trigger, Adjustable Depth Control, Plastic Carrying Case Included*

## XT8664 T-Nailer

*Weight: 4 lbs. 10 oz.*
*Dimensions: 14-1/4" L x 3-1/2" W x 10" H*

| Tool | Nail Capacity | Nail Range | Diameter | Exhaust |
|---|---|---|---|---|
| XT8664 | 100 T-Nails | 5/8" to 2-1/2" 16mm to 64mm | .086 | Adjustable |

***Applications:***
*Fastening Tack Strips to Concrete*

***Features:***
***Uses Spotnails® T08611H,*** *360° Adj. Exhaust, Rubber Grip for Comfort, Restrictive Trigger, Adjustable Depth Control, Plastic Carrying Case Included,*

## XBA1564 15 Gauge DA Angle Finish Nailer

*Weight: 4 lbs. 4 oz.*
*13-1/4" L x 3" W x 9-1/4" H*

| Tool | Brad Capacity | Brad Range | Diameter | Exhaust |
|---|---|---|---|---|
| XBA1564 | 100 Angle Brads | 1" to 2-1/2" 25mm to 64mm | 15 Gauge | Adjustable |

***Applications:***
*Trim Molding, Door & Window Casing, Cabinet Assembly, Hardwood Flooring, Wall Paneling & Drawer Sides*

***Features:***
***Uses Spotnails® 1500 APB, APG or Senco® DA Brads,*** *360° Adjustable Exhaust, Rubber Grip for Comfort, Quick Clear Nose, Restrictive Trigger, Adjustable Depth Control, Plastic Carrying Case Included*

## XBFN64 15 Gauge FN Angle Finish Nailer

*Weight: 4 lbs. 10 oz.*
*13-1/4" L x 3" W x 9-1/4" H*

| Tool | Brad Capacity | Brad Range | Diameter | Exhaust |
|---|---|---|---|---|
| XBFN64 | 100 Angle Brads | 1" to 2-1/2" 25mm to 64mm | 15 Gauge | Adjustable |

***Applications:***
*Trim Molding, Door & Window Casing, Cabinet Assembly, Hardwood Flooring, Wall Paneling, Drawer Sides*

***Features:***
***Uses Spotnails® 1500 FNG or 15 Gauge Bostitch® FN Angle Brads,*** *360° Adjustable Exhaust, Rubber Grip for Comfort, Quick Clear Nose, Restrictive Trigger, Adjustable Depth Control, Plastic Carrying Case Included*

## XB1564 15/16 Gauge Finish Nailer

*Weight: 4 lbs. 4 oz.*
*10" L x 3" W x 10-1/2" H*

| Tool | Brad Capacity | Brad Range | Diameter | Exhaust |
|---|---|---|---|---|
| XB1564 | 100 Brads | 1" to 2-1/2" 25mm to 64mm | 15/16 Gauge | Adjustable |

***Applications:***
*Trim Molding, Door & Window Casing, Cabinet Assembly, Hardwood Flooring, Wall Paneling, Drawer Sides*

***Features:***
***Uses Spotnails® 1500 PG & 16 Gauge Brads,*** *360° Adjustable Exhaust, Rubber Grip for Comfort, Quick Clear Nose, Restrictive Trigger, Adjustable Depth Control, Plastic Carrying Case Included*

## WB1650 16 Gauge Bradder

*Weight: 3 lbs. 9 oz.*
*9" L x 2-1/2" W x 9-1/2" H*

| Tool | Brad Capacity | Brad Range | Diameter | Exhaust |
|---|---|---|---|---|
| WB1650 | 100 Brads | 3/4" to 2" 19mm to 50mm | 16 Gauge | Adjustable |

***Applications:***
*Trim Molding, Door & Window Casing, Cabinet Assembly, Hardwood Flooring, Wall Paneling, Drawer Sides*

***Features:***
***Uses Spotnails® 16 Gauge Brads,*** *360° Adjustable Exhaust, Rubber Grip for Comfort, Quick Clear Nose, Restrictive Trigger, Adjustable Depth Control, Plastic Carrying Case Included,*
***Long Magazine is Available (WB1650LM)***

## WB1850 18 GAUGE BRADDER

*Weight: 3 lbs. 9 oz.*
*9" L x 2-1/2" W x 9-1/2" H*

| Tool | Brad Capacity | Brad Range | Diameter | Exhaust |
|---|---|---|---|---|
| WB1850 | 101 Brads | 1" to 2"<br>25mm to 50mm | 18 Gauge | Adjustable |

***Applications:***
*Trim Molding, Hardwood Flooring, Wall Paneling, Furniture & Cabinet Assembly*

***Features:***
***Uses Spotnails® 18 Gauge Brads AX Type,*** *360° Adjustable Exhaust, Rubber Grip for Comfort, Quick Clear Nose, Restrictive Trigger, Adjustable Depth Control, Plastic Carrying Case Included,* ***Long Magazine is Available (WB1850LM)***

## CB1850 18 GAUGE BRADDER

*Weight: 2 lbs. 4 oz.*
*10-1/2" L x 2" W x 9" H*

| Tool | Brad Capacity | Brad Range | Diameter | Exhaust |
|---|---|---|---|---|
| CB1850 | 115 Brads | 1/2" to 2"<br>12mm to 50mm | 18 Gauge | Adjustable |

***Applications:***
*Trim Molding, Hardwood Flooring, Wall Paneling, Furniture & Cabinet Assembly*

***Features:***
***Uses Spotnails® 18 Gauge Brads AX Type,*** *360° Adjustable Exhaust, Rubber Grip for Comfort, Quick Clear Nose, Restrictive Trigger, Adjustable Depth Control, Plastic Carrying Case Included*



## TB1840 18 GAUGE BRADDER

*Weight: 3 lbs. 0 oz.*
*9" L x 2-1/2" W x 8-1/4" H*

| Tool | Brad Capacity | Brad Range | Diameter | Exhaust |
|---|---|---|---|---|
| TB1840 | 101 Brads | 1" to 1-9/16"<br>25mm to 40mm | 18 Gauge | Adjustable |

***Applications:***
*Trim Molding, Door & Window Casing, Furniture & Cabinet Assembly, Hardwood Flooring, Wall Paneling, Drawer Sides*

***Features:***
***Uses Spotnails® 18 Gauge Brads AX Type,*** *360° Adjustable Exhaust, Rubber Grip for Comfort, Quick Clear Nose, Restrictive Trigger, Adjustable Depth Control, Plastic Carrying Case Included*

## CB1832 18 GAUGE BRADDER

*Weight: 2 lbs. 3 oz.*
*10" L x 2" W x 8" H*

| Tool | Brad Capacity | Brad Range | Diameter | Exhaust |
|---|---|---|---|---|
| CB1832 | 100 Brads | 3/8" to 1-1/4"<br>10mm to 32mm | 18 Gauge | Adjustable |

***Applications:***
*Trim Molding, Hardwood Flooring, Wall Paneling, Furniture & Cabinet Assembly*

***Features:***
***Uses Spotnails® 18 Gauge Brads AX Type,*** *360° Adjustable Exhaust, Rubber Grip for Comfort, Quick Clear Nose, Restrictive Trigger, Adjustable Depth Control, Plastic Carrying Case Included*



## SP2340 23 GAUGE PINNER

*Weight: 2 lbs. 9 oz.*
*10-1/4" L x 1-1/2" W x 7-1/2" H*

| Tool | Pin Capacity | Pin Range | Diameter | Exhaust |
|---|---|---|---|---|
| SP2340 | 100 Pins | 1/2" to 1-9/16"<br>12mm to 40mm | 23 Gauge | Front |

***Applications:***
*Trim Molding, Furniture & Cabinet Assembly*

***Features:***
***Uses Spotnails® 23 gauge Pins,*** *Full Pin Range is 1/2" (12mm), 5/8" (15mm), 3/4" (18mm), 7/8" (22mm), 1" (25mm), 1-3/16" (30mm), 1-3/8" (35mm), 1-9/16" (40mm). 360° Adjustable Exhaust, Rubber Grip for Comfort, Adjustable Depth Control, Automatic Height Adjuster For Fasteners, Plastic Carrying Case Included*

## MS2440 14 GAUGE WIDE CROWN STAPLER

*Weight: 5 lbs. 1 oz.*
*14" L x 3-1/2" W x 9-3/4" H*

| Tool | Staple Capacity | Staple Range | Diameter | Exhaust |
|---|---|---|---|---|
| MS2440 | 130 Staples | 7/8" to 1-1/2"<br>22mm to 40mm | 14 Gauge | Adjustable |

***Applications:***
*Truss Manufacturing*

***Features:***
***Uses Spotnails™ 2400 Staples & Paslode™ Staples,*** *360° Adjustable Exhaust, Restrictive Trigger, Plastic Carrying Case Included*

1" Crown



## MS6564 15 GAUGE MEDIUM CROWN STAPLER

*Weight: 5 lbs. 7 oz.*
*14-1/2" L x 4" W x 11" H*

| Tool | Staple Capacity | Staple Range | Diameter | Exhaust |
|---|---|---|---|---|
| MS6564 | 138 Staples | 1-1/2" to 2-1/2"<br>40mm to 64mm | 15 Gauge | Adjustable |

***Applications:***
*Crating*

***Features:***
***Uses Spotnails™ 6500 Staples & Senco™ Q Staples ,*** *360° Adjustable Exhaust, Restrictive Trigger, Plastic Carrying Case Included*

7/16" Crown

## MS7564 15 GAUGE MEDIUM CROWN STAPLER

*Weight: 5 lbs. 9 oz.*
*14-1/2" L x 4-1/2" W x 10-1/2" H*

| Tool | Staple Capacity | Staple Range | Diameter | Exhaust |
|---|---|---|---|---|
| MS7564 | 138 Staples | 1-1/2" to 2-1/2"<br>40mm to 64mm | 15 Gauge | Adjustable |

***Applications:***
*Crating*

***Features:***
***Uses Spotnails™ 7500 Staples & Bostitch™ BCS1516 Staples,*** *360° Adjustable Exhaust, Restrictive Trigger, Plastic Carrying Case Included,*
***Long Magazine is Available (MS7564LM)***

1/2" Crown

## XS1640 16 GAUGE WIDE CROWN STAPLER

*Weight: 5 lbs. 1 oz.*
*14" L x 3-1/2" W x 9-3/4" H*

| Tool | Staple Capacity | Staple Range | Diameter | Exhaust |
|---|---|---|---|---|
| XS1640 | 150 Staples | 5/8" to 1-1/2"<br>16mm to 40mm | 16 Gauge | Adjustable |

***Applications:***
*Insulating Material, Packaging, Crating, Roofing*, Lathing**

***Features:***
***Uses Spotnails™ 1600 Staples & Bostitch™ Wide Crown Staples,*** *360° Adjustable Exhaust, Restrictive Trigger, Plastic Carrying Case Included,*
****Roofing or Lathing Safety Sold Separately***

1" Crown



## XS1650 16 GAUGE WIDE CROWN STAPLER

Weight: 5 lbs. 2 oz.
14" L x 3-1/2" W x 9-3/4" H

| Tool | Staple Capacity | Staple Range | Diameter | Exhaust |
|---|---|---|---|---|
| XS1650 | 150 Staples | 1" to 2"<br>25mm to 50mm | 16 Gauge | Adjustable |

***Applications:***
*Lathing*

***Features:***
***Uses Spotnails™ 1600 Staples & Bostitch™ Staples,*** *360° Adjustable Exhaust, Rubber Grip for Comfort, Adjustable Depth Control, Quick Clear Nose, Plastic Carrying Case Included*




## XS2640 16 GAUGE WIDE CROWN STAPLER

Weight: 5 lbs. 1 oz.
14" L x 3-1/2" W x 9-3/4" H

| Tool | Staple Capacity | Staple Range | Diameter | Exhaust |
|---|---|---|---|---|
| XS2640 | 150 Staples | 5/8" to 1-1/2"<br>16mm to 40mm | 16 Gauge | Adjustable |

***Applications:***
*Insulating Material, Packaging, Crating, Roofing*, Lathing**

***Features:***
***Uses Spotnails™ 2600 Staples & Paslode™ GSW 16 Staples,*** *360° Adjustable Exhaust, Rubber Grip for Comfort, Adjustable Depth Control, Quick Clear Nose, Plastic Carrying Case Included,* ****Roofing or Lathing Safety Sold Separately***




## XS2650 16 GAUGE WIDE CROWN STAPLER

Weight: 5 lbs. 2 oz.
14" L x 3-1/2" W x 9-3/4" H

| Tool | Staple Capacity | Staple Range | Diameter | Exhaust |
|---|---|---|---|---|
| XS2650 | 150 Staples | 1" to 2"<br>25mm to 50mm | 16 Gauge | Adjustable |

***Applications:***
*Lathing*

***Features:***
***Uses Spotnails™ 2600 Staples & Paslode™ GSW 16 Staples,*** *360° Adjustable Exhaust, Rubber Grip for Comfort, Adjustable Depth Control, Quick Clear Nose, Plastic Carrying Case Included,*
****Roofing or Lathing Safety Sold Separately***




## XS3640 16 GAUGE WIDE CROWN STAPLER

Weight: 5 lbs. 1 oz.
14" L x 3-1/2" W x 9-3/4" H

| Tool | Staple Capacity | Staple Range | Diameter | Exhaust |
|---|---|---|---|---|
| XS3640 | 150 Staples | 5/8" to 1-1/2"<br>16mm to 40mm | 16 Gauge | Adjustable |

***Applications:***
*Insulating Material, Packaging, Crating, Roofing*, Lathing**

***Features:***
***Uses Spotnails™ 3600, Senco™ P, & Duo-Fast™ 1700 Staples,*** *360° Adjustable Exhaust, Rubber Grip for Comfort, Adjustable Depth Control, Quick Clear Nose, Plastic Carrying Case Included,*
****Roofing or Lathing Safety Sold Separately, Long Magazine is Available (XS3640LM)***




## XS3650 16 GAUGE WIDE CROWN STAPLER

Weight: 5 lbs. 2 oz.
14" L x 3-1/2" W x 9-3/4" H

| Tool | Staple Capacity | Staple Range | Diameter | Exhaust |
|---|---|---|---|---|
| XS3650 | 150 Staples | 1" to 2"<br>25mm to 50mm | 16 Gauge | Adjustable |

***Applications:***
*Lathing*

***Features:***
***Uses Spotnails™ 3600, Senco™ P, & Duo-Fast™ 1700 Staples,*** *360° Adjustable Exhaust, Rubber Grip for Comfort, Adjustable Depth Control, Quick Clear Nose, Plastic Carrying Case Included,* ****Roofing or Lathing Safety Sold Separately***



## XS6650 16 GAUGE MEDIUM CROWN STAPLER

*Weight: 4 lbs. 8 oz.*
*14-1/2" L x 4" W x 10" H*

| Tool | Staple Capacity | Staple Range | Diameter | Exhaust |
|---|---|---|---|---|
| XS6650 | 150 Staples | 5/8" to 2"<br>16mm to 50mm | 16 Gauge | Adjustable |

***Applications:***
*Plywood Wall Sheathing, Floor Underlayment, Roof & Wall Shingles, Furniture Frames, Cabinet Sub-Assembly, Gypsum Wall Sheathing, Millwork - Door Jambs, Existing Siding*

***Features:***
***Uses Spotnails™ 6600 & 5600, Senco™ N & Duo-Fast™ 7600 Staples,*** *360° Adjustable Exhaust, Rubber Grip for Comfort, Adjustable Depth Control, Quick Clear Nose, Plastic Carrying Case,* ***Long Magazine is Available (XS6650LM)***

7/16" Crown

## MS6650i 16 GAUGE INDUSTRIAL MEDIUM CROWN STAPLER

***FOR EXTRA POWER!***

*Weight: 5 lbs. 7 oz.*
*14-1/2" L x 4-1/2" W x 10-1/2" H*

| Tool | Staple Capacity | Staple Range | Diameter | Exhaust |
|---|---|---|---|---|
| MS6650i | 150 Staples | 5/8" to 2"<br>16mm to 50mm | 16 Gauge | Adjustable |

***Applications:***
*Plywood Wall Sheathing, Floor Underlayment, Roof & Wall Shingles, Furniture Frames, Cabinet Sub-Assembly, Gypsum Wall Sheathing, Millwork - Door Jambs, Existing Siding*

***Features:***
***Uses Spotnails™ 6600 & 5600, Senco™ N & Duo-Fast™ 7600 Staples,*** *360° Adjustable Exhaust, Rubber Grip for Comfort, Adjustable Depth Control, Quick Clear Nose, Plastic Carrying Case Included,* ***Long Magazine is Available (MS6650iLM)***

7/16" Crown

## XS76-8650 16 GAUGE MEDIUM CROWN STAPLER

*Weight: 4 lbs. 8 oz.*
*14-1/2" L x 4" W x 10" H*

| Tool | Staple Capacity | Staple Range | Diameter | Exhaust |
|---|---|---|---|---|
| XS76-8650 | 150 Staples | 5/8" to 2"<br>16mm to 50mm | 16 Gauge | Adjustable |

***Applications:***
*Plywood Wall Sheathing, Floor Underlayment, Roof & Wall Shingles, Furniture Frames, Cabinet Sub-Assembly, Gypsum Wall Sheathing, Millwork - Door Jambs, Existing Siding*

***Features:***
***Uses Spotnails™ 7600 & 8600, Paslode™ GS16 & Bostitch™ 16S4 Staples,*** *360° Adjustable Exhaust, Rubber Grip for Comfort, Adjustable Depth Control, Quick Clear Nose, Plastic Carrying Case Included*

1/2" Crown

## MS76-8650i 16 GAUGE INDUSTRIAL MEDIUM CROWN STAPLER

***FOR EXTRA POWER!***

*Weight: 5 lbs. 7 oz.*
*14-1/2" L x 4-1/2" W x 10-1/2" H*

| Tool | Staple Capacity | Staple Range | Diameter | Exhaust |
|---|---|---|---|---|
| MS76-8650i | 150 Staples | 3/4" to 2"<br>19mm to 50mm | 16 Gauge | Adjustable |

***Applications:***
*Plywood Wall Sheathing, Floor Underlayment, Roof & Wall Shingles, Furniture Frames, Cabinet Sub-Assembly, Gypsum Wall Sheathing, Millwork - Door Jambs, Existing Siding*

***Features:***
***Uses Spotnails™ 7600 & 8600, Paslode™ GS16 & Bostitch™ 16S4 Staples,*** *360° Adjustable Exhaust, Rubber Grip for Comfort, Adjustable Depth Control, Quick Clear Nose, Plastic Carrying Case Included*

1/2" Crown

## TS6825 18 GAUGE MEDIUM CROWN STAPLER

*Weight: 2 lbs. 13 oz.*
*9-1/2″ L x 2-1/2″ W x 8-1/4″ H*

| Tool | Staple Capacity | Staple Range | Diameter | Exhaust |
|---|---|---|---|---|
| TS6825 | 168 Staples | 3/8″ to 1″<br>9mm to 25mm | 18 Gauge | Adjustable |

***Applications:***
*Case Backing, Drawer Assembly, Trim Molding, Heavy Cabinet, *Vinyl Siding Installation*

***Features:***
***Uses Spotnails™ 6800, Senco™ M, & Duo-Fast™ W1800 Staples,*** *360° Adjustable Exhaust, Rubber Grip for Comfort, Adjustable Depth Control, Quick Clear Nose, Plastic Carrying Case Included,* ****With Vinyl Siding Safety (TS6825V)***

3/8″ Crown

## WS4840 18 GAUGE NARROW CROWN STAPLER

*Weight: 3 lbs. 9 oz.*
*12″ L x 2-1/2″ W x 9-1/2″ H*

| Tool | Staple Capacity | Staple Range | Diameter | Exhaust |
|---|---|---|---|---|
| WS4840 | 168 Staples | 1/2″ to 1-5/8″<br>12mm to 40mm | 18 Gauge | Adjustable |

***Applications:***
*Underlayment, Furniture Assembly, Door & Window Trim, Corner Blocks, Drawer & Cabinet Assembly*

***Features:***
***Uses Spotnails™ 4800, Senco™ L, & Duo-Fast™ 1800 Staples,*** *360° Adjustable Exhaust, Rubber Grip for Comfort, Adjustable Depth Control, Quick Clear Nose, Restrictive Trigger, Plastic Carrying Case Included,* ***Long Magazine is Available (WS4840LM)***

1/4″ Crown



## TS4825 18 GAUGE NARROW CROWN STAPLER

*Weight: 3 lbs. 0 oz.*
*9-1/2″ L x 2-1/2″ W x 8-1/4″ H*

| Tool | Staple Capacity | Staple Range | Diameter | Exhaust |
|---|---|---|---|---|
| TS4825 | 168 Staples | 3/8″ to 1″<br>9mm to 25mm | 18 Gauge | Adjustable |

***Applications:***
*Underlayment, Furniture Assembly, Door & Window Trim, Corner Blocks, Drawer and Cabinet Assembly*

***Features:***
***Uses Spotnails™ 4800, Senco™ L, & Duo-Fast™ 1800 Staples,*** *360° Adjustable Exhaust, Rubber Grip for Comfort, Adjustable Depth Control, Quick Clear Nose, Plastic Carrying Case Included*

1/4″ Crown



## TS3832 18 GAUGE NARROW CROWN STAPLER

*Weight: 2 lbs. 13 oz.*
*11-1/2″ L x 2-1/2″ W x 8″ H*

| Tool | Staple Capacity | Staple Range | Diameter | Exhaust |
|---|---|---|---|---|
| TS3832 | 168 Staples | 1/2″ to 1-1/4″<br>12mm to 32mm | 18 Gauge | Adjustable |

***Applications:***
*Underlayment, Furniture Assembly, Door & Window Trim, Corner Blocks, Drawer & Cabinet Assembly*

***Features:***
***Uses Spotnails™ 3800 Staples,*** *360° Adjustable Exhaust, Rubber Grip for Comfort, Adjustable Depth Control, Quick Clear Nose, Restrictive Trigger, Plastic Carrying Case Included,*
***Long Magazine is Available (TS3832LM)***

3/16″ Crown



## WS4840W2 18 GAUGE NARROW CROWN STAPLER

Weight: 4 lbs.11 oz.
12″ L x 2-1/2″ W x 9-1/2″ H

| Tool | Staple Capacity | Staple Range | Diameter | Exhaust |
|---|---|---|---|---|
| WS4840W2 | 168 Staples | 1-3/8″ 35mm | 18 Gauge | Adjustable |

***Applications:***
*For Use On Engineered Hardwoods (3/8″, 1/2″ & 9/16″ Floors)*

***Features:***
***Uses Spotnails® 4811PN Nylon Coated Staples To Prevent Withdrawal,*** *360° Adjustable Exhaust, Rubber Grip for Comfort, Quick Clear Nose,Plastic Carrying Case Included*

1/4″ Crown



## AF3807S 18 GAUGE UNDERLAYMENT TOOL

Weight: 4 lbs. 6 oz.
Dimensions: 14″ L x 2″ W x 7″ H

| Tool | Staple Capacity | Staple Range | Diameter | Exhaust |
|---|---|---|---|---|
| AF3807S | 200 Staples | 7/8″ 22mm | 18 Gauge | N/A |

***Applications:***
*Underlayment*

***Features:***
***Uses Spotnails® 3807 DG Staples,*** *Manual Underlayment Tool Automatically Countersinks Divergent Staples, No Hoses or Cords Required, No Set-Up Time*

3/16″ Crown



*Divergent Staple*

## XS1640RFH XS3640RFH

### 16 GAUGE WIDE CROWN RADIANT FLOOR STAPLERS

NEW!

Weight: 9 lbs. 1 oz.
14″ L x 3-1/2″ W x 36-1/2″ H

| Tool | Staple Capacity | Staple Range | Diameter | Exhaust |
|---|---|---|---|---|
| XS1640RFH | 150 Staples | 1″ to 1-1/2″ 25mm to 40mm | 16 Gauge | Adjustable |
| XS3640RFH | 150 Staples | 1″ to 1-1/2″ 25mm to 40mm | 16 Gauge | Adjustable |

***Applications:***
*Radiant Floor Heating*

***Features:***
***XS1640RFH Uses Spotnails® 1600 Staples & Bostitch® Wide Crown Staples. XS3640RFH Uses Spotnails® 3600 Staples, Senco® P & Duo-Fast® 1700 Staples.*** *360° Adjustable Exhaust, Adjustable Depth Control, Quick Clear Nose, Two Guide Blocks For Tubing, Walking Stick Also Available Separately (AS-99090)*

1″ Crown



## FS7550 FLOORING STAPLER FCL2650 CLEAT FLOORING TOOL

Weight: 10 lbs. 0 oz.
17″ L x 3-1/2″ W x 21″ H

| Tool | Staple Capacity | Staple Range | Diameter | Exhaust |
|---|---|---|---|---|
| FS7550 | 100 Staples | 1-1/2″ to 2″ 40mm to 50mm | 15 Gauge | N/A |
| FCL2650 | 100 Cleats | 2″ 50mm | 15 Gauge | N/A |

***Applications:***
***FS7550:*** *Install 3/4″ Solid Hardwood Flooring.*
***FCL2650:*** *Tongue & Groove 3/4″ Flooring*

***Features:***
***FS7550 Uses Spotnails™ 7500 Staples & Bostitch™ BCS1516 Staples. FCL2650 Uses Spotnails™ 26132 "L" Flooring Cleats.*** *Rubber Grip For Comfort, Plastic Carrying Case Included, Mallet Included*

FS7550 1/2″ Crown



FCL2650 L Cleat

## DS7116 DS8016 DS5016

Weight: 1 lb. 12 oz.
Dimensions: 8" L x 1-1/2" W x 6" H

| Tool | Staple Capacity | Staple Range | Diameter | Crown | Exhaust |
|---|---|---|---|---|---|
| DS7116 | 100 Staples | 5/32" to 9/16" 4mm to 14mm | 22 Gauge | 3/8" | Rear |
| DS8016 | 100 Staples | 1/8" to 9/16" 3mm to 14mm | 20 Gauge | 1/2" | Rear |
| DS5016 | 84 Staples | 1/4" to 9/16" 6mm to 14mm | 20 Gauge | 1/2" | Rear |

***Applications:***
***DS7116:*** *Upholstery, Automotive Vinyl & Interior Trim, Insulation, Installation of Wire Screens*
***DS8016 & DS5016:*** *Upholstery, Roofing Felt, Screening*
***Features:***
***DS7116 Uses Spotnails® 71 Series Staples, DS8016 Uses Spotnails® 80 Series Staples, DS5016 Uses Spotnails® 35000 & Duo-Fast® 50 Series Staples***

## JS7116 JS8016 JS5016

Weight: 2 lb. 3 oz.
Dimensions: 8" L x 1-1/2" W x 6" H

| Tool | Staple Capacity | Staple Range | Diameter | Crown | Exhaust |
|---|---|---|---|---|---|
| JS7116 | 100 Staples | 5/32" to 9/16" 4mm to 14mm | 22 Gauge | 3/8" | Front |
| JS8016 | 100 Staples | 1/8" to 9/16" 3mm to 14mm | 20 Gauge | 1/2" | Front |
| JS5016 | 84 Staples | 1/4" to 9/16" 6mm to 14mm | 20 Gauge | 1/2" | Front |

***Applications:***
***JS7116:*** *Upholstery, Automotive Vinyl & Interior Trim, Insulation, Installation of Wire Screens*
***JS8016 & JS5016:*** *Upholstery, Roofing Felt, Screening*
***Features:***
***JS7116 Uses Spotnails® 71 Series Staples, JS8016 Uses Spotnails® 80 Series Staples, JS5016 Uses Spotnails® 35000 & Duo-Fast® 50 Series Staples***

## JS7116LN JS8016LN JS5016LN

Weight: 2 lb. 5 oz.
Dimensions: 8-1/2" L x 1-3/4" W x 8" H

| Tool | Staple Capacity | Staple Range | Diameter | Crown | Exhaust |
|---|---|---|---|---|---|
| JS7116LN | 100 Staples | 5/32" to 9/16" 4mm to 14mm | 22 Gauge | 3/8" | Front |
| JS8016LN | 100 Staples | 1/8" to 9/16" 3mm to 14mm | 20 Gauge | 1/2" | Front |
| JS5016LN | 84 Staples | 1/4" to 9/16" 6mm to 14mm | 20 Gauge | 1/2" | Front |

***Applications:***
***JS7116LN:*** *Upholstery, Automotive Vinyl & Interior Trim,* ***JS5016LN & JS8016LN:*** *Upholstery, Roofing Felt, Screening*
***Features:***
***JS7116LN Uses Spotnails® 71 Series Staples, JS8016LN Uses Spotnails® 80 Series Staples, JS5016LN Uses Spotnails® 35000 & Duo-Fast® 50 Series Staples***

## BS7116AF BS8016AF BS5016AF BSA1116AF

Weight: 2 lb. 6 oz.
15-1/4" L x 1-1/2" W x 5-1/2" H

| Tool | Staple Capacity | Staple Range | Diameter | Crown | Exhaust |
|---|---|---|---|---|---|
| BS7116AF | 200 Staples | 5/32" to 9/16" 4mm to 14mm | 22 Gauge | 3/8" | Rear |
| BS8016AF | 200 Staples | 1/8" to 9/16" 3mm to 14mm | 20 Gauge | 1/2" | Rear |
| BS5016AF | 168 Staples | 1/4" to 9/16" 6mm to 14mm | 20 Gauge | 1/2" | Rear |
| BSA1116AF | 168 Staples | 1/4" to 9/16" 6mm to 14mm | 20 Gauge | 3/8" | Rear |

***Applications:***
***BS7116AF:*** *Upholstery, Automotive Vinyl & Interior Trim, Insulation,* ***BS8016AF, BS5016AF & BSA1116AF:*** *Upholstery, Roofing Felt*
***Features:***
***BS7116AF Spotnails® 71 Series Staples, BS80116AF Uses Spotnails® 80 Series Staples, BS5016AF Uses Spotnails® 35000 & Duo-Fast® 50 Series Staples, BSA1116AF Uses Spotnails® A-11 Series Staples***

## XC1016 CORRUGATED FASTENER

Weight: 5 lbs. 3 oz.
Dimensions: 14" L x 3-1/2" W x 9-1/4" H

| Tool | Capacity | Range | Diameter | Exhaust |
|---|---|---|---|---|
| XC1016 | 120 Fasteners | 1/4" to 5/8"<br>6mm to 16mm | 1" | Adjustable |



***Applications:***
*Drives 1" Wide Strip Steel Corrugated Fasteners in 1/4", 3/8", 1/2" and 5/8" Lengths, For Use On End Gable or Roof Jack Connections, Hollow Core Doors, Furniture Butt Joints, Pallet Repair*

***Features:***
***Uses Spotnails® 416, 616, 816 & 1016 Fasteners,*** *360° Adjustable Exhaust, Rubber Grip for Comfort, Adjustable Depth Control, Quick Clear Nose,Restrictive Trigger, Plastic Carrying Case Included*

## GCS8116 20 GAUGE CAP STAPLER

Weight: 4 lbs. 0 oz.
Dimensions: 14" L x 7-1/2" W x 7" H

| Tool | Staple Capacity | Staple Range | Diameter | Exhaust |
|---|---|---|---|---|
| GCS8116 | 200 Staples/200 Caps | 5/8"<br>16mm | 20 Gauge | Adjustable |

***Applications:***
*Installing Housewrap, Roofing Felt*

***Features:***
***Uses 136225 Staples,*** *3/8" Crown Staples, 360° Adjustable Exhaust, Rubber Grip for Comfort, Adjustable Depth Control, Quick Clear Nose, Plastic Carrying Case Included*

## TCS6832 CROSSFIRE 18 GAUGE CAP STAPLER

Weight: 4 lbs. 13 oz.
13-1/2" L x 9-1/2" W x 8-1/2" H

| Tool | Staple Capacity | Staple Range | Diameter | Exhaust |
|---|---|---|---|---|
| TCS6832 | 200 Staples/<br>200 Caps | 5/8" & 7/8"<br>16mm & 22mm<br>1-1/4" & 1-1/2"<br>32mm & 38mm | 18 Gauge<br><br>18 Gauge | Front |

***Applications:***
*Installing Housewrap, Roofing Felt, Foam Board*

***Features:***
***Uses Spotnails® 136025 - 136095 Staples,*** *3/8" Crown Staples, Blue Adjustable Trigger, Rubber Grip for Comfort, Quick Clear Nose, Plastic Carrying Case Included*

## 136400 CAP HAMMER TACKER

*by National Nail™*

Weight: 2 lbs. 6 oz.
Dimensions: 17" L x 2" W x 5" H

| Tool | Staple Capacity | Staple Range | Diameter | Exhaust |
|---|---|---|---|---|
| 136400 | 168 Staples/<br>168 Caps | 3/8"<br>10mm | 20 Gauge | N/A |

***Applications:***
*Roofing Felt, Housewrap*

***Features:***
***Uses 136420 Staples,*** *Airless Cap System*

## 07020D CLIPPER PLIER STAPLER

Weight: 1 lbs. 0 oz.
Dimensions: 6-3/4" L x 3/4" W x 3-7/8" H

| Tool | Staple Capacity | Staple Range | Diameter | Exhaust |
|---|---|---|---|---|
| 07020D | 210 Staples | 1/4"<br>6mm | 1/2" Crown | N/A |



*Standard Staple*

***Applications:***
*Laundries, Dry Cleaners, Checkout Counters, Factories*

***Features:***
*Uses 1/2" Undulated Crown Staples 70001 For Strength or Standard Office Staples 76001 In 1/4" Length, All Steel Construction, 2-5/8" Throat Depth*

# STAINLESS STEEL FASTENERS

*New Quantities Ideal For Contractors*
*Retail Packs On All Brads & Nails*

### ROOFING NAILS

| Stock # | Length |
|---|---|
| CRN10SSR-7.2M | 1-1/4" |

### COIL FENCING NAILS

| Stock # | Length |
|---|---|
| CW4D090SSR-3.6M | 1-1/2" |
| CW5D090SSR-3.6M | 1-3/4" |
| CW5.5D090SSR-3.6M | 1-7/8" |

### 21° ROUND HEAD NAILS

| Stock # | Length |
|---|---|
| 2-8D113SSR | 2-3/8" |
| 2-10D120SSR | 3" |
| 2-12D120SSR | 3-1/4" |

### 15 GAUGE ANGLE BRADS

| Stock # | Length |
|---|---|
| 1512APS | 1-1/2" |
| 1516APS | 2" |
| 1520APS | 2-1/2" |

### 16 GAUGE BRADS



| Stock # | Length |
|---|---|
| 16124SS | 1-1/2" |
| 16132SS | 2" |
| 16140SS | 2-1/2" |

### 18 GAUGE BRADS



| Stock # | Length |
|---|---|
| 18110SS | 5/8" |
| 18112SS | 3/4" |
| 18116SS | 1" |
| 18120SS | 1-1/4" |
| 18124SS | 1-1/2" |
| 18132SS | 2" |

### 15 GAUGE STAPLES (Bostitch™)

| Stock # | Length |
|---|---|
| 7516PS-4.5M | 2" |

### 15 GAUGE STAPLES (Senco™ Q/Duo-Fast™)

| Stock # | Length |
|---|---|
| 6520PS-6.2M | 2-1/2" |

### 16 GAUGE 1" WIDE CROWN STAPLES (Spotnails™ Bostitch™)

| Stock # | Length |
|---|---|
| 1608PS-10M | 1" |

### 16 GAUGE 15/16" WIDE CROWN STAPLES (Paslode™)

| Stock # | Length |
|---|---|
| 2608PS-10M | 1" |

### 16 GAUGE 1" WIDE CROWN STAPLES (Senco™ Duo-Fast™)

| Stock # | Length |
|---|---|
| 3608PS-10M | 1" |

### 16 GAUGE 1/2" MEDIUM CROWN STAPLES (Paslode™ GS)

| Stock # | Length |
|---|---|
| 8608PS-10M | 1" |
| 8609PS-10M | 1-1/8" |
| 8610PS-10M | 1-1/4" |
| 8612PS-10M | 1-1/2" |
| 8614PS-10M | 1-3/4" |
| 8616PS-10M | 2" |

### 16 GAUGE 7/16" CROWN STAPLES (Spotnails™/Bostitch™)

| Stock # | Length |
|---|---|
| 7610PS-10M | 1-1/4" |
| 7612PS-10M | 1-1/2" |
| 7614PS-10M | 1-3/4" |
| 7616PS-10M | 2" |

### 16 GAUGE 7/16" CROWN STAPLES (Senco™/Duo-Fast™)

| Stock # | Length |
|---|---|
| 6608PS-10M | 1" |
| 6610PS-10M | 1-1/4" |
| 6612PS-10M | 1-1/2" |
| 6614PS-10M | 1-3/4" |
| 6616PS-10M | 2" |

### 16 GA 7/16" INTERMEDIATE CROWN STAPLES (Paslode™ GSI/Duo-Fast™)

| Stock # | Length |
|---|---|
| 5636PS-10M | 1-1/8" |
| 5640PS-10M | 1-1/4" |
| 5648PS-10M | 1-1/2" |

### 18 GAUGE 1/4" NARROW CROWN STAPLES (Spotnails™/Duo-Fast™/Senco™)



| Stock # | Length |
|---|---|
| 4806PS-25M | 3/4" |
| 4808PS-25M | 1" |
| 4810PS-25M | 1-1/4" |
| 4812PS-25M | 1-1/2" |

***DON'T SEE AN ITEM YOU WANT? WE PRODUCE RUN TO ORDER ITEMS!***

# STAINLESS STEEL FINE WIRE FASTENERS

| FINE WIRE STAPLES (Duo-Fast™ 50 Series) | |
|---|---|
| Stock # | Length |
| 35504SS | 1/4″ |
| 35506SS | 3/8″ |
| 35508SS | 1/2″ |
| 36504SS | 1/4″ Div. Pt. |
| 36506SS | 3/8″ Div. Pt. |
| 36508SS | 1/2″ Div. Pt. |

| FINE WIRE STAPLES (71 Series/Senco™ C) | |
|---|---|
| Stock # | Length |
| 87004SS | 1/4″ |
| 87005SS | 5/16″ |
| 87006SS | 3/8″ |
| 87008SS | 1/2″ |
| 87009SS | 9/16″ |

| FINE WIRE STAPLES (Duo-Fast™ 31 Series) | |
|---|---|
| Stock # | Length |
| 31004SS | 1/4″ |
| 31006SS | 3/8″ |
| 31008SS | 1/2″ |

| FINE WIRE STAPLES (Duo-Fast™ 80 Series) | |
|---|---|
| Stock # | Length |
| 98004SS | 1/4″ |
| 98006SS | 3/8″ |
| 98008SS | 1/2″ |

SPOTNAILS®

# OPTIONAL TOOL ACCESSORIES

### VINYL SIDING ATTACHMENT KIT

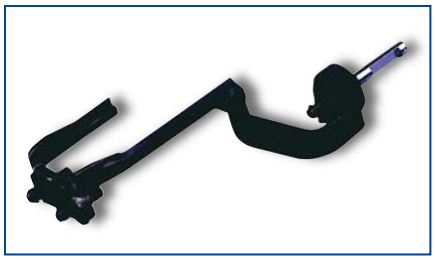

AS-99077 For 16 Gauge Medium Crown Tools
AS-99087 For 18 Gauge Medium Crown Tools

### LATHING OR ROOFING SAFETY

For 16 Gauge Wide Crown Tools, 1-1/2″ Max.
P-53167 For Lathing, P-53175 For Roofing

### FILTER END CAP ASSEMBLY



P-97454
For Striker X Body Tools

### POSITIVE PLACEMENT ATTACHMENT KIT

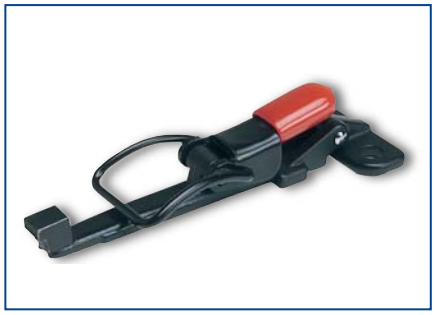

AS-99080
For WS4840

### LONG MAGAZINE ASSEMBLY

Long Magazines Available For:
MS7564 Capacity: 200
MS6650i Capacity: 337
TS3832 Capacity: 300
WB1650 Capacity: 200
WB1850 Capacity: 200
WS4840 Capacity: 300
XS3640 Capacity: 300
XS6650 Capacity: 337

## KEY CODE

DUO-FAST™ | SPOTNAILS™ | PASLODE™
SENCO™ | BOSTITCH™ | JK™/BEA™/RAPID™

| SPOTNAILS FASTENERS | Spotnails Tools | Senco | Duo-Fast | Bostitch | Paslode | Porter | Hitachi | Fasco | Dewalt | Makita | Max | Other |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| **2-6D113 - 2-16D131**<br>20-22 Degree Nails<br>2" - 3-1/2" | NPR90<br>YPR90 | FramePro 600 FRH, 650<br>FramePro 602/652<br>FramePro 700XL, 750XL<br>FramePro 702XP/752XP-FRH<br>SN60, SN65, SN65C | CN350<br>CN-350B (22°)<br>CN-350B-SH<br>CN-137<br>NSP-350F New | N95RHN<br>N88RH-MCN2<br>N88RH<br>N86S<br>RN90 | 5350/SRH-20 | FR350 | NR83A (20°)<br>NR90AC<br>NR83A2<br>NR83A2S | F5C-RHN20-83<br>F6 RHN20-90<br>R5C RHN20-90 | D51845<br>D51844, | AN8300<br>AN922 | SN80<br>SN90<br>SN90A<br>SN890RH | Rigid: R350CHA<br>Grip-Rite: GRTRH350 |
| Clipped Head Strip Nails<br>(31°) 2" - 3-1/2" | YTD90<br>NTD90 | SN70, SN325+, SN2<br>SN2+, SN3, SN4<br>FramePro 701XP<br>FramePro 751XP<br>FramePro 601<br>FramePro 651<br>FramePro 700/750<br>FramePro 600/650 | | N90PT | Impulse 325<br>Impulse 325CT<br>Impulse 350<br>IM CT<br>IM 325PP<br>5300, 5325<br>5350<br>PM5350-90S<br>F350S, F400S | FC350<br>FM350 | NR90AA<br>NR90AD<br>NR83AA3<br>NR83AA | F6 HHN 31-90<br>R5C HHN 31-90 | D51823<br>D51822 | AN942 | SN890CH/34 | Rigid: R350CHA<br>Grip-Rite: GRTCH350 |
| **CRN08G-CRN14G**<br>Roofing Coil Nails<br>1" to 1-3/4" | VRN45<br>KRN45 | SCN200R<br>SCN40R<br>RoofPro 450<br>RoofPro 455XP | DRN-45<br>RN-175A | N12B<br>RN45<br>RN45B<br>RN46 | 3175/44RCU<br>R175C | 134R<br>RN175<br>RN175A | NV45AB<br>NV45AC<br>NV45AB2 | F3C CN15W-32<br>F4 CN15W-45<br>R4 CN15W-45 | | AN451 | CN450R | Rigid: R175RNA<br>Grip-Rite: GRTCR175 |
| **CW Series Nails**<br>Flat Coil Nails .083<br>1-1/4" to 2-1/4" | LCN57 | SCN45 | | N55C<br>N64C<br>N65CP-1<br>N65CP-2 | 3225 | | | R4 CN15W-50 | | | CN55 | |
| **CW Series Nails**<br>Flat Coil Nails .099<br>2" to 2-1/2" | MCW64 | SCN56<br>SCN60<br>SCN65<br>SCN200<br>SCN300 | CNW-75 | N63CP<br>N64CP<br>N57C<br>N70C<br>N86C, N100C<br>N70CB<br>N80CB<br>N100CPP | P275C<br>P350C<br>F4250/65CP<br>4275/CN70<br>5325/CN80 | Coil 250<br>Coil 350 | NV65AB<br>NV65AC<br>NV83A | F5 CN15W-65<br>R5 CN15W-65 | | AN611 | CN70 to 2-3/4"<br>CN80 to 3-1/4"<br>CN80F<br>CN100<br>CN565<br>CN890S<br>CN890II | |
| **CW Series Nails**<br>Flat Coil Nails .113 - .131<br>2" to 3-1/4" | YCN83 | SCN65<br>SCN60<br>SCN300 | CNW-75<br>DCN-325/85L | N80C<br>N80CB<br>N86C<br>N100C<br>N100CPP | F275C<br>F325C<br>F4250/65CP<br>F4275/CN70<br>5325/CN80 | Coil 350 | NV65AB<br>NV65AC<br>NV83A<br>NV83A2 | | | AN621<br>AN901 | CN70 to 2-3/4"<br>Max CN80<br>CN80F to 3-1/4"<br>Max CN100<br>CN890S to 3-1/2"<br>CN890II<br>CN665, HN90 | |
| **CPD Series Nails**<br>Coil Plastic Duo-Fast<br>1-3/4" to 2-1/4" | | | DCN-225<br>KDN-50A<br>RCN-60<br>RCN-70/60A<br>CNP-60Y<br>CNP-65Y<br>RCN-60/225AD | | | | | | | | | |
| **CPM Nails**<br>Plastic Coil - Max Type<br>2.25 x .092 | | SCN45 | | N63CP | | | NV65AH<br>NV75AH | | | AN611 | CN4525-K<br>CN552S<br>CN565S<br>CN565D | |
| **CWC Nails**<br>Cone Coil Nails .083<br>1-1/4" to 2" | VCN50 | SCN45 | | | | | NV50A1 | | | | CN502 | |
| **T08611H**<br>T-Nails<br>11/16" | XT8664 | | | MIII812CNCT<br>MA-097-T | | | | | | | | |
| **1508APB-1520APB**<br>15 Gauge Angle Brads<br>1" to 2-1/2" | XBA1564 | FinishPro 41XP<br>SFN40<br>FinishPro 35<br>SFN1, SNF1+<br>SN1,<br>SFN30, SFN2B<br>Airfree 41 | DAFN-6480 | | | DA250A<br>DA250B<br>DAFN-6480<br>CDA250 | NT65AA<br>NT65MA | F3C BA-50<br>F4 BA-65<br>R3C BA-50<br>R4 BA-65<br>F48A-65CT | D51275 | AF631<br>AF632 | NF-550/15-65 | Rigid: R250AFA<br>Grip-Rite: GRTAN250 |
| **1510-1520**<br>15 Gauge Brads<br>1-1/4" to 2-1/2" | XB1564 | | | | | | | | | | | |
| **1510FNG-1520FNG**<br>15 Gauge Bostitch FN<br>Brads 1-1/4" to 2-1/2" | XBFN64 | | | N60FN<br>N62FN | | | | | | | NF510/15-50 | |
| **16212FNG-16220FNG**<br>16 Gauge Angle Brads<br>1-1/2" to 2-1/2" | | | | N60FN<br>N62FN | T250A-F16<br>T250-F16<br>3250-F16 | | | | DC618K Cordless<br>DC614KA Cordless | | NF510/15-50 | |
| **16512-16540**<br>16 Gauge Brads<br>3/4" to 2-1/2" | WB1650<br>XB1564 | Finish Pro 32 | LFN-748A-1-1/2"<br>LFN764A-2" | SB-1664-FN<br>T40-B<br>T36-50 | 3200-F16<br>3250-F16<br>IM250-F16<br>MU-112<br>MU-212-F<br>T250-F-16 | FN250<br>FN250A<br>FN250B<br>FN200 | NT65A<br>NT65A2 | F26C FN-50<br>F3P FN-50<br>R3C FN-50<br>R3T FN-70 | D51256<br>DC612KA<br>Cordless<br>DC616KA<br>Cordless | | NF 352-ST/16-50 | Rigid: R250SFA<br>Grip-Rite: GRTFN250<br>Haubold: SKS64A/16 |

| SPOTNAILS FASTENERS | Spotnails Tools | Senco | Duo-Fast | Bostitch | Paslode | Porter | Hitachi | Fasco | Dewalt | Makita | Max | Other |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| **18008-18532(AX)**<br>18 Gauge Brads<br>1/2" to 2" | WB1850<br>TB1840<br>CB1832<br>CB1850 | Finish Pro 18<br>Finish Pro 2N1<br>Finish Pro 25XP<br>LS4<br>LS5<br>SLP20/LS1 | BB-4440<br>DBN-40525C<br>Pro-5<br>DBN-4440<br>DBN-4450 | BT35B<br>BT50B<br>BT125SK<br>BT200K<br>T29-30<br>T31-1<br>SB-1842BN<br>SB-1850BN<br>SB-21N1 | T125-F18<br>T200-F18<br>Cordless 901000<br>2138-F!8<br>2138-F18II<br>IM200-F18 | BN125A<br>BN200A<br>BN200V12 | NT45A<br>NT32AE<br>NT50AD<br>NT50AE | F20 PGN-31<br>F20 TGN-40<br>F25A GN-40<br>F26C GN-50<br>R3C-GN-50 | D51238 | AF501<br>AF502<br>AF503 | NF 211/18-25<br>NF 211/18-50<br>NF 221/18-55<br>NF255-ST/18<br>NF201/18-35<br>(PX Only) | Rigid: R213BNA<br>Grip-Rite: GRTBN200<br>Omer: 1220<br>1240 |
| **18008AY-18516(AY)**<br>18 Gauge Brads, 1/2" to 1" | | SLP20 | | | | | | | | | | |
| **23005-23025**<br>23 Gauge Headless Pins<br>5/16" to 1-9/16" | SP2325<br>SP2340 | SHP10 | | | | Pin 100 | | | | | | Omer: PR.18, P.25<br>PR.28 |
| **2407PGH-2410PGH**<br>Wide Crn 15/16" High Tensile | MS2440 | | | | 4510W14 | | | | | | | |
| **7512-7520**<br>15 Gauge 1/2" Med Crn<br>Staples, 1-1/2" to 2-1/2" | FS7550<br>MS7564 | | | MIII-FS | | | | | | | | Grip-Rite: GR200FS |
| **6512-6520**<br>15 Gauge 7/16" Med Crn<br>Staples, 1-1/2" to 2-1/2" | MS6564 | | | | | | | | | | | |
| **1605-1620**<br>16 Gauge 1" Wide Crown<br>Staples, 5/8" to 2-1/2" | XS1640<br>XS1650<br>XS1640RFH | | | 438S2R<br>T35-8<br>T35-32<br>450S2R<br>T40S2-CT<br>T50S2-1 | | | | F3C ATW-38 | | | | Omer: WS.38 |
| **2605-2616**<br>16 Gauge 15/16" Wide Crn<br>Staples, 5/8" to 2" | XS2640<br>XS2650 | | | | S150-W16R<br>S200-W16<br>MU-112-W16R<br>3150-W16<br>3150-W16R<br>3200-W16 | | | F3C PSW-38R<br>R3C PSW-39CT | | | | Omer: WK.38 |
| **3605-3616**<br>16 Gauge 1" Wide Crown<br>Staples, 5/8" to 2 " | XS3640<br>XS3650<br>XS3640RFH | MW, PW, PW-2"<br>PW-R, PW 200<br>SPS<br>SPS-RFR | KW-1748<br>RNS-1748I<br>RS-1748<br>SW-1748 | | | | N3824A | F3C SNW-38R<br>R3C SNW-38TL | | | | Omer: WP.38 |
| **6605-6616**<br>16 Gauge 7/16" Med. Crn<br>Staples, 5/8" to 2" | XS6650<br>MS6650i | M1, M2+, M2<br>SKS N12-N17<br>SNS45, SNS40, SNS41<br>SNS44XP, SNS45XP<br>SNS50 | | | | | N5008AB<br>N5008AC | F4 PG-50<br>F45C G-55<br>R3 CG-40CT<br>R4 PG-50CT | D51430 | | TA551/16-11 | |
| **7605-7616**<br>16 Gauge 1/2" Med. Crn<br>Staples, 5/8" to 2" | XS76-8650<br>MS76-8650i | | | T55S4-1<br>T40S4-CT<br>T36-1<br>T36-50<br>650S4<br>T50S4-1<br>438S4<br>T38 | | | | | | | | |
| **8605-8616**<br>16 Gauge 1/2" Med. Crn<br>Staples, 5/8" to 2" | XS76-8650<br>MS76-8650i | | | | IM200-S16<br>S200-S16<br>MA-S16L<br>3200-S16<br>3200-S16P<br>3150-S16<br>PA-200 | | | R3C HD-40 VIL-SID | D51431 | | | |
| **5632-5664**<br>16 Gauge 7/16" Int. Crn<br>Staples, 1" to 2" | XS6650<br>MS6650i | | KS-7648 1-1/2"<br>MS-7664E 2"<br>DS-7656P 1-3/4"<br>DS-7664P 2"<br>SM-7648<br>SM-7664 | | GSI 3150<br>3200-116<br>MA-GS116 | MS200 | N5008AB | | | | TA551/76 | |
| **5803-5812**<br>18 Gauge Intermediate Crn<br>Staples, 3/8" to 1-1/2" | | | | T-28-8 | | | | F22A 92-25 | | | | BeA: 92/25-553,<br>92/40-722 |
| **6803-6812**<br>18 Gauge Intermediate Crn<br>Staples, 3/8" to 1-1/2" | TS6825 | SKS-M<br>SLS20-M | DMS-W1832 | | | | | | | | | |
| **7805-7808**<br>18 Gauge 7/16" Med. Crn<br>Staples, 5/8" to 1" | | | | | GSI-18 | | | | | | | |
| **4803-4813**<br>18 Gauge 1/4" Narrow Crn<br>Staples, 3/8" to 1-5/8" | WS4840<br>TS4825<br>WS4840W2 | SKSN4450<br>KMN4450<br>LN4450<br>SKS L<br>FinishPro 2N1<br>SLS18, SLS20<br>SLS25XP | KN-1848A<br>KB-1836<br>BN-1832<br>DNS-1840<br>ST-18 (Man.-<br>-HIT) | | | NS100<br>NS150<br>NSS150<br>NS100A<br>NS150A | N3804AB<br>N3804A | F20T 90-30 CT<br>F20T 90-40 CT<br>R3C 90-40 CT<br>F20-40<br>F25A-90-40<br>F3C 90-40 LN<br>F21T 90-40A | | | TA238/18-6 | Rigid: R150FSA<br>Kihlberg: PN6040V |
| **4811PN**<br>18 Gauge 1/4" Narrow Crn<br>Staples, 1-3/8" | WS4840W2 | | | | | | | | | | | |
| **3804-3810**<br>18 Gauge 3/16" Narrow Crn<br>Staples, 1/2" to 1-1/4" | TS3832<br>AF3807S | | | | | | | F3 38-30CT | | | | |

| SPOTNAILS FASTENERS | Spotnails Tools | Senco | Duo-Fast | Bostitch | Paslode | Porter | Hitachi | Fasco | Dewalt | Makita | Max | Other |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| **2806-2812 GSN Series**<br>18 Gauge 3/16" Narrow Crown , 3/4" to 1-1/2" | | | | | 2118-N18<br>2125-N18<br>3150-N18<br>S150-F18 | | | | | | | |
| **416-616-816**<br>1" Wide Corrugated Fasteners, 416-1/4", 616-3/8",816-1/2" Lengths | XC1016 | SC2 | CF-100A | | MA-C20 | | | R4P CF-12CT<br>F45C CF9-<br>-15SS (CT) | | | | |
| **136025-136095**<br>Cap Stapler, 5/8" to 1-1/2" | TCS6832 | | | | | | | | | | | |
| **26132**<br>Flooring Cleat<br>2" | FCL2650 | SHF50/15/10 | HFN1 | HFN1<br>MIIIFN<br>MFN200 | | FCN200 | | | | | | |
| **31004-31009**<br>3/8" Crown Fine Wire<br>1/4" to 9/16", (31 Series) | | | | | | | | | | | | |
| **33004-33009**<br>3/8" Crown Fine Wire<br>Staple 1/4" to 9/16"<br>Similar to 33 Series | | | TI-3118<br>EIC-3118 | | | | | | | | | |
| **35504-35509/36505**<br>1/2" Crown Fine Wire<br>Staple 1/4" to 9/16"<br>Similar to 50 Series | 35000<br>DS5016<br>JS5016<br>JS5016LN<br>BS5016AF | | HT550<br>CT<br>CT859 | | | | | | | | | BeA: 95/14<br>Kihlberg: 64 |
| **32506-32509/34509**<br>3/16" Crown Fine Wire<br>Staple 3/8" to 9/16"<br>Similar to 54 Series | | | ENC-5418<br>BN-5424 | | | | | F1A 54DF-18<br>F1B 54DF-18 | | | | |
| **38506-38509/35706**<br>1/2" Crown Fine Wire<br>Staple 3/8" to 9/16"<br>Similar to 75 Series | 35700 | | HT755 | | | | | | | | | |
| **91206-91210**<br>1/2" Crown Fine Wire<br>Staple 3/8" to 5/8"<br>Similar to SB103020 | | | | P-50 | | | | | | | | |
| **83506**<br>3/8" Fine Wire Staple<br>Similar to SHCR5019 | | | | H2B | | | | | | | | |
| **82504-82509**<br>3/8" Crown Fine Wire<br>Staple 1/4" to 9/16"<br>Similar to STCR5019 | | | | H-30H<br>T5-8<br>ET5<br>T15 | | | | | | | | Kihlberg: R-19 |
| **81504-81508**<br>3/8" Crown Fine Wire<br>Staple 1/4" to 1/2"<br>Similar to STCR2619 | | | | H-30-6<br>75-6 | | | | | | | | |
| **78504**<br>1/4" Fine Wire Staple<br>Similar to STCR2115 | | | | B-8P | | | | | | | | |
| **73004**<br>3/8" Crown Fine Wire<br>Staple 1/4"<br>Similar to SP19 | | | | P-3 | | | | | | | | |
| **85504-85509/86506**<br>3/8" Crown Fine Wire<br>Staple 1/4" to 9/16"<br>Similar to A-11/T-50 | 85000 | | | | | | | F1A A11-16<br>Auto L/M | | | | Arrow: T-50, HT-50<br>Rapid: A-11, R-11 |
| **84504**<br>3/8" Crown Fine Wire<br>Staple1/4"<br>Similar to Rapid 19, 28, 30 | 84000 | | | | | | | | | | | Rapid: R-19 |
| **94206-94210**<br>1/2" Crown Fine Wire<br>Staple 3/8" to 5/8"<br>Similar to JK777 | | | | | | | | | | | | Kihlberg: JK-20T-L |
| **95506-95510**<br>1/2" Crown Fine Wire<br>Staple 3/8" to 5/8"<br>Similar to JK779 | | | | | | | | | | | | Kihlberg: JK-20T<br>JK-20T-L |
| **87002.5-87009**<br>3/8" Crown Fine Wire<br>Staple 5/32" to 9/16"<br>Similar to 71 Series | DS7116<br>JS7116<br>JS7116LN<br>BS7116AF | SJS<br>JG<br>SFTB | BN5424 | | | | | F23G-16<br>F1A S3G-16 | | | | BeA: 71/14<br>Kihlberg: 20/670<br>Haubold: PN814 |
| **98004-98009**<br>1/2" Crown Fine Wire<br>Staple 1/4" to 9/16"<br>Similar to 80 Series | DS8016<br>JS8016<br>JS8016LN<br>BS8016AF | | | | | | | | | | | BeA: 80<br>Haubold: PN814<br>Kihlberg: JK-20-680 |
| **99004-99009**<br>3/8" Crown Fine Wire<br>Staple 1/4" to 9/16"<br>Similar to 1400 Series | | | | | | | | | | | | Haubold: PN1416F<br>FN1414G |

# The TEBO™ & TEBO Decker™

## Hidden Deck Fastener

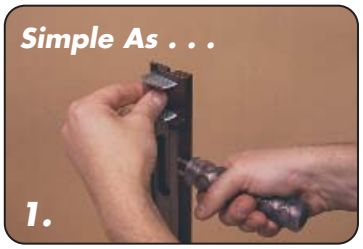

***The Fastest Way To A Better Looking Deck!!***

- ***No Unsightly Fastener Marks or Dangerous Pop Ups!***
- ***For Use With Any Thickness of Deck Board, Hard or Soft Woods & Composites!***
- ***Stainless Steel Fasteners For Long Lasting Performance***

LOCKS **DECK BOARD** & **JOIST** SIMULTANEOUSLY WHILE 3RD PRONG LOCKS NEXT BOARD INTO PLACE

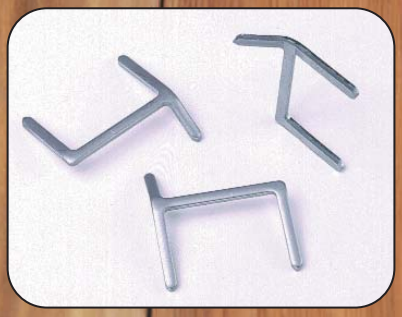

***#44120***
***TEBO™ Stainless Steel Deck Fasteners***

***#45120***
***Inverted Point For Dense Composites***

***#TEBO2***
***TEBO Decker™ Hidden Deck Fastener Tool***

MAKES ALL DECKING LOOK BETTER WITHOUT NAILS OR SCREWS VISIBLE!

SPOTNAILS®

# Cap Staplers

**TCS6832** 18 Gauge Cap Stapler.

**GCS8116** 20 Gauge Cap Stapler.

- ***Quality Installation Has Never Been So Easy!***
- ***10 Times Faster Installation Than With Hand Driven Applications***
- ***Ideal For Installing Housewrap, Foam Board* and Roofing Felt***

The exclusive basket feed loads in seconds and eliminates cardboard sleeves or tubes.

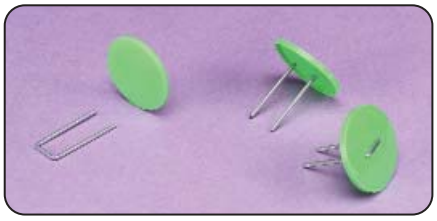

Cap Staples have 10x greater holding power than staples alone.

| Tool | Staple Capacity | Staple Range | Diameter | Exhaust |
|---|---|---|---|---|
| TCS6832 | 200 Staples/ 200 Caps | 5/8" & 7/8" 16mm & 22mm | 18 Gauge | Front |
| | | 1-1/4" & 1-1/2" 32mm & 38mm | 18 Gauge | |

| Tool | Staple Capacity | Staple Range | Diameter | Exhaust |
|---|---|---|---|---|
| GCS8116 | 200 Staples/200 Caps | 5/8" 16mm | 20 Gauge | Adjustable |

**Roofing Felt**

**Foam Board - *TCS6832 Only**

**House Wrap**

SPOTNAILS®

1100 Hicks Road • Rolling Meadows, IL 60008 • USA
**Phone: 847.259.1620 or 800.873.2239 • Fax: 847.259.9236 or 888.369.2588 • www.spotnails.com**

PUB NO. CAT 1007 10M